


# Datamate J-Tek Connectors

## Female Crimp Kit - Reverse Fix

- ❖ Allows for further flexibility in system design.
- ❖ Crimp contacts supplied loose and are inserted from rear.
- ❖ Part numbers are for a complete kit of a housing and the applicable number of contacts.
- ❖ Jackscrews are assembled.
- ❖ Mates with male Datamate J-Tek connectors with compatible Reverse Fix jackscrews.

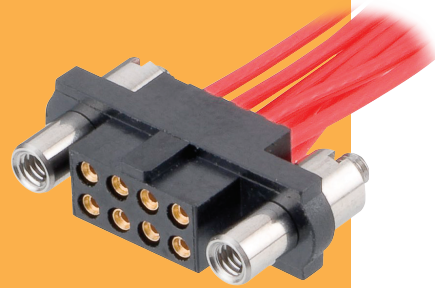

DATAMATE J-TEK

WITH JACKSCREWS	CALCULATION	WIRE STRIPPING DETAILS																																							
	<table border="1"> <tr> <td><b>A</b></td> <td><math>B + 12</math></td> </tr> <tr> <td><b>B</b></td> <td>Total no. of contacts - 2</td> </tr> <tr> <td><b>C</b></td> <td><math>B + 7</math></td> </tr> </table>	<b>A</b>	$B + 12$	<b>B</b>	Total no. of contacts - 2	<b>C</b>	$B + 7$																																		
	<b>A</b>	$B + 12$																																							
	<b>B</b>	Total no. of contacts - 2																																							
<b>C</b>	$B + 7$																																								
<p><b>Board Mount Nut, 2 per connector</b></p>	<table border="1"> <tr> <th colspan="2" style="background-color: #f4a460;">TOOLS</th> </tr> <tr> <td colspan="2"><b>Recommended Crimp Tool</b> - M22520/2-01</td> </tr> <tr> <td colspan="2"><b>Positioner</b> - T5747</td> </tr> <tr> <td colspan="2"><b>Contact Insertion/Removal Tool</b> - Z80-280</td> </tr> <tr> <td colspan="2">❖ Spare and pre-cabled contacts shown on following pages.</td> </tr> <tr> <td colspan="2">❖ Instruction sheets available at <a href="http://www.harwin.com/instructions">www.harwin.com/instructions</a>.</td> </tr> </table>	TOOLS		<b>Recommended Crimp Tool</b> - M22520/2-01		<b>Positioner</b> - T5747		<b>Contact Insertion/Removal Tool</b> - Z80-280		❖ Spare and pre-cabled contacts shown on following pages.		❖ Instruction sheets available at <a href="http://www.harwin.com/instructions">www.harwin.com/instructions</a> .																													
TOOLS																																									
<b>Recommended Crimp Tool</b> - M22520/2-01																																									
<b>Positioner</b> - T5747																																									
<b>Contact Insertion/Removal Tool</b> - Z80-280																																									
❖ Spare and pre-cabled contacts shown on following pages.																																									
❖ Instruction sheets available at <a href="http://www.harwin.com/instructions">www.harwin.com/instructions</a> .																																									
<p><b>HOW TO ORDER</b></p>																																									
<p><b>SERIES CODE</b>   <b>M80 - 4XX XX XX</b></p> <table border="1"> <tr> <th colspan="2" style="background-color: #f4a460;">TYPE</th> </tr> <tr> <td><b>462</b></td> <td>Large Bore (22 AWG)</td> </tr> <tr> <td><b>463</b></td> <td>Small Bore (24-28 AWG)</td> </tr> </table> <table border="1"> <tr> <th colspan="2" style="background-color: #f4a460;">TOTAL NO. OF CONTACTS</th> </tr> <tr> <td colspan="2"><b>04, 06, 08, 10, 12, 14, 20, 26, 34, 42, 50</b></td> </tr> </table> <table border="1"> <tr> <th colspan="2" style="background-color: #f4a460;">FINISH</th> </tr> <tr> <td><b>05</b></td> <td>Gold</td> </tr> <tr> <td><b>42</b></td> <td>Gold + Tin</td> </tr> </table> <p><b>3.5mm Board Mount Jackscrews only</b></p>	TYPE		<b>462</b>	Large Bore (22 AWG)	<b>463</b>	Small Bore (24-28 AWG)	TOTAL NO. OF CONTACTS		<b>04, 06, 08, 10, 12, 14, 20, 26, 34, 42, 50</b>		FINISH		<b>05</b>	Gold	<b>42</b>	Gold + Tin	<p><b>SERIES CODE</b>   <b>M80 - 4 X1 XX XX FX</b></p> <table border="1"> <tr> <th colspan="2" style="background-color: #f4a460;">TYPE</th> </tr> <tr> <td><b>C1</b></td> <td>Small Bore (24-28 AWG)</td> </tr> <tr> <td><b>D1</b></td> <td>Large Bore (22 AWG)</td> </tr> <tr> <td><b>E1</b></td> <td>Extra Small Bore (28-32 AWG)</td> </tr> </table> <table border="1"> <tr> <th colspan="2" style="background-color: #f4a460;">TOTAL NO. OF CONTACTS</th> </tr> <tr> <td colspan="2"><b>04, 06, 08, 10, 12, 14, 20, 26, 34, 42, 50</b></td> </tr> </table> <table border="1"> <tr> <th colspan="2" style="background-color: #f4a460;">FINISH</th> </tr> <tr> <td><b>05</b></td> <td>Gold</td> </tr> <tr> <td><b>42</b></td> <td>Gold + Tin</td> </tr> </table> <table border="1"> <tr> <th colspan="2" style="background-color: #f4a460;">JACKSCREW</th> </tr> <tr> <td><b>F8</b></td> <td>3.5mm Board Mount</td> </tr> <tr> <td><b>F9</b></td> <td>5mm Board Mount</td> </tr> </table>	TYPE		<b>C1</b>	Small Bore (24-28 AWG)	<b>D1</b>	Large Bore (22 AWG)	<b>E1</b>	Extra Small Bore (28-32 AWG)	TOTAL NO. OF CONTACTS		<b>04, 06, 08, 10, 12, 14, 20, 26, 34, 42, 50</b>		FINISH		<b>05</b>	Gold	<b>42</b>	Gold + Tin	JACKSCREW		<b>F8</b>	3.5mm Board Mount	<b>F9</b>	5mm Board Mount
TYPE																																									
<b>462</b>	Large Bore (22 AWG)																																								
<b>463</b>	Small Bore (24-28 AWG)																																								
TOTAL NO. OF CONTACTS																																									
<b>04, 06, 08, 10, 12, 14, 20, 26, 34, 42, 50</b>																																									
FINISH																																									
<b>05</b>	Gold																																								
<b>42</b>	Gold + Tin																																								
TYPE																																									
<b>C1</b>	Small Bore (24-28 AWG)																																								
<b>D1</b>	Large Bore (22 AWG)																																								
<b>E1</b>	Extra Small Bore (28-32 AWG)																																								
TOTAL NO. OF CONTACTS																																									
<b>04, 06, 08, 10, 12, 14, 20, 26, 34, 42, 50</b>																																									
FINISH																																									
<b>05</b>	Gold																																								
<b>42</b>	Gold + Tin																																								
JACKSCREW																																									
<b>F8</b>	3.5mm Board Mount																																								
<b>F9</b>	5mm Board Mount																																								

All dimensions in mm.