


Datamate J-Tek Connectors

Female Crimp Kit - Extra Small Bore

- Part numbers are for a complete kit of a housing and the applicable number of contacts.
- Jackscrews are assembled where specified.
- Crimp contacts are rear insertable.
- Versions also available for 22 - 28 AWG cable - see the previous page.
- Spare contacts are available.

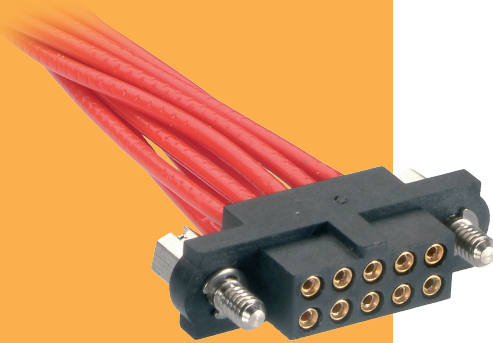

DATAMATE J-TEK

WITHOUT JACKSCREWS	WITH JACKSCREWS												
<table border="1" style="background-color: #f4a460; width: 100%;"> <thead> <tr> <th colspan="2">CALCULATION</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>$B + 12$</td> </tr> <tr> <td>B</td> <td>Total no. of contacts - 2</td> </tr> <tr> <td>C</td> <td>$B + 7$</td> </tr> </tbody> </table>		CALCULATION		A	$B + 12$	B	Total no. of contacts - 2	C	$B + 7$				
CALCULATION													
A	$B + 12$												
B	Total no. of contacts - 2												
C	$B + 7$												
TOOLS	WIRE STRIPPING DETAILS												
<p>Recommended Crimp Tool - M22520/2-01</p> <p>Positioner - T5747</p> <p>Contact Insertion/Removal Tool - Z80-280</p> <ul style="list-style-type: none"> Spare and pre-cabled contacts shown on following pages. Instruction sheets available at www.harwin.com/instructions. 													
HOW TO ORDER													
M80 - 4 E1 XX XX FX													
<table border="1" style="background-color: #f4a460;"> <tr> <th colspan="2">SERIES CODE</th> </tr> <tr> <td style="width: 50px;">M80</td> <td>4</td> </tr> </table>	SERIES CODE		M80	4	<table border="1" style="background-color: #f4a460;"> <tr> <th colspan="2">JACKSCREW</th> </tr> <tr> <td>00</td> <td>Without Jackscrews</td> </tr> <tr> <td>F1</td> <td>With Hex Slotted Jackscrews</td> </tr> <tr> <td>F2</td> <td>With Hex Socket Jackscrews</td> </tr> </table>	JACKSCREW		00	Without Jackscrews	F1	With Hex Slotted Jackscrews	F2	With Hex Socket Jackscrews
SERIES CODE													
M80	4												
JACKSCREW													
00	Without Jackscrews												
F1	With Hex Slotted Jackscrews												
F2	With Hex Socket Jackscrews												
<table border="1" style="background-color: #f4a460;"> <tr> <th colspan="2">TYPE</th> </tr> <tr> <td>E1</td> <td>Extra Small Bore 28-32 AWG</td> </tr> </table>	TYPE		E1	Extra Small Bore 28-32 AWG	<table border="1" style="background-color: #f4a460;"> <tr> <th colspan="2">FINISH</th> </tr> <tr> <td>05</td> <td>Gold</td> </tr> <tr> <td>42</td> <td>Gold + Tin</td> </tr> </table>	FINISH		05	Gold	42	Gold + Tin		
TYPE													
E1	Extra Small Bore 28-32 AWG												
FINISH													
05	Gold												
42	Gold + Tin												
<table border="1" style="background-color: #f4a460;"> <tr> <th colspan="2">TOTAL NO. OF CONTACTS</th> </tr> <tr> <td>04, 06, 08, 10, 12, 14, 20, 26, 34, 42, 50</td> <td></td> </tr> </table>	TOTAL NO. OF CONTACTS		04, 06, 08, 10, 12, 14, 20, 26, 34, 42, 50										
TOTAL NO. OF CONTACTS													
04, 06, 08, 10, 12, 14, 20, 26, 34, 42, 50													

All dimensions in mm.