


# Datamate J-Tek Connectors

DATAMATE J-TEK

## Male Crimp Kit

- Part numbers are for a complete kit of a housing and the applicable number of contacts.
- Jackscrews are assembled where specified.
- Crimp contacts supplied loose.
- Crimp contacts are rear insertable and replaceable.
- Spare contacts are available.

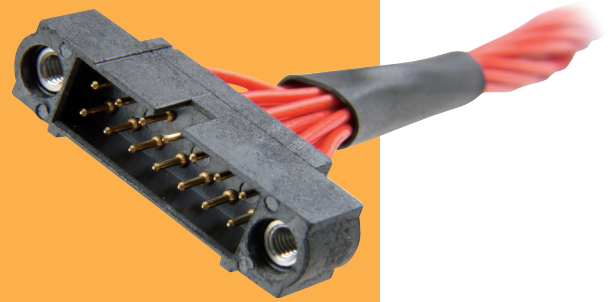

WITHOUT JACKSCREWS	WITH JACKSCREWS																
<table border="1" style="width: 100%;"> <thead> <tr> <th colspan="2" style="background-color: #f4a460;">CALCULATION</th> </tr> </thead> <tbody> <tr> <td style="width: 30px;"><b>A</b></td> <td><math>B + 12</math></td> </tr> <tr> <td><b>B</b></td> <td>Total no. of contacts - 2</td> </tr> <tr> <td><b>C</b></td> <td><math>B + 7</math></td> </tr> </tbody> </table>		CALCULATION		<b>A</b>	$B + 12$	<b>B</b>	Total no. of contacts - 2	<b>C</b>	$B + 7$								
CALCULATION																	
<b>A</b>	$B + 12$																
<b>B</b>	Total no. of contacts - 2																
<b>C</b>	$B + 7$																
TOOLS	WIRE STRIPPING DETAILS																
<p><b>Recommended Crimp Tool</b> - M22520/2-01</p> <p><b>Positioner</b> - Z80-193</p> <p><b>Contact Insertion/Removal Tool</b> - Z80-280</p> <ul style="list-style-type: none"> <li>Spare contacts shown on following pages.</li> <li>Instruction sheets available at <a href="http://www.harwin.com/instructions">www.harwin.com/instructions</a>.</li> </ul>																	
HOW TO ORDER																	
<p><b>M80 - 5XX XX 05</b></p>																	
<table border="1" style="width: 100%;"> <thead> <tr> <th colspan="2" style="background-color: #f4a460;">SERIES CODE</th> </tr> </thead> <tbody> <tr> <th style="background-color: #f4a460;">TYPE</th> <td></td> </tr> <tr> <td><b>570</b></td> <td>Large Bore (22 AWG), without Jackscrews</td> </tr> <tr> <td><b>571</b></td> <td>Small Bore (24-28 AWG), without Jackscrews</td> </tr> <tr> <td><b>560</b></td> <td>Large Bore (22 AWG), with Jackscrews</td> </tr> <tr> <td><b>561</b></td> <td>Small Bore (24-28 AWG), with Jackscrews</td> </tr> </tbody> </table>	SERIES CODE		TYPE		<b>570</b>	Large Bore (22 AWG), without Jackscrews	<b>571</b>	Small Bore (24-28 AWG), without Jackscrews	<b>560</b>	Large Bore (22 AWG), with Jackscrews	<b>561</b>	Small Bore (24-28 AWG), with Jackscrews	<table border="1" style="width: 100%;"> <thead> <tr> <th colspan="2" style="background-color: #f4a460;">FINISH</th> </tr> </thead> <tbody> <tr> <td style="width: 30px;"><b>05</b></td> <td>Gold</td> </tr> </tbody> </table>	FINISH		<b>05</b>	Gold
SERIES CODE																	
TYPE																	
<b>570</b>	Large Bore (22 AWG), without Jackscrews																
<b>571</b>	Small Bore (24-28 AWG), without Jackscrews																
<b>560</b>	Large Bore (22 AWG), with Jackscrews																
<b>561</b>	Small Bore (24-28 AWG), with Jackscrews																
FINISH																	
<b>05</b>	Gold																
<table border="1" style="width: 100%;"> <thead> <tr> <th colspan="2" style="background-color: #f4a460;">TOTAL NO. OF CONTACTS</th> </tr> </thead> <tbody> <tr> <td colspan="2" style="text-align: center;"><b>04, 06, 08, 10, 12, 14, 20, 26, 34, 42, 50</b></td> </tr> </tbody> </table>		TOTAL NO. OF CONTACTS		<b>04, 06, 08, 10, 12, 14, 20, 26, 34, 42, 50</b>													
TOTAL NO. OF CONTACTS																	
<b>04, 06, 08, 10, 12, 14, 20, 26, 34, 42, 50</b>																	

All dimensions in mm.