


# Archer Kontrol Connectors

## Female Cable Assemblies


- ❖ Ready-made cable assemblies with female IDC connectors on both ends.
- ❖ Fitted with 30AWG ribbon cable to UL2678.
- ❖ Contact a1 is attached to a1, contact b1 attached to b1, etc.
- ❖ Compatible with all male Archer Kontrol connectors.
- ❖ For additional cable lengths, please consult our Experts at [www.harwin.com/contact](http://www.harwin.com/contact).

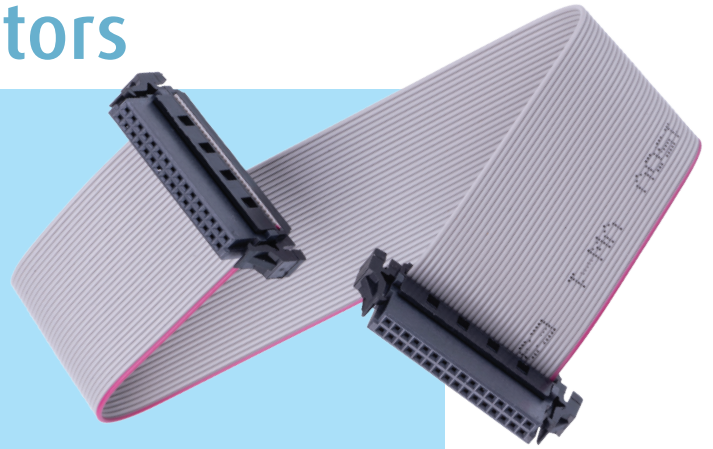

### FEMALE-FEMALE DOUBLE ENDED

#### CALCULATION

<b>A</b>	$B + 9.65$
<b>B</b>	$0.635 \times (\text{Total No. of contacts} - 2)$
<b>D</b>	$B + 3$

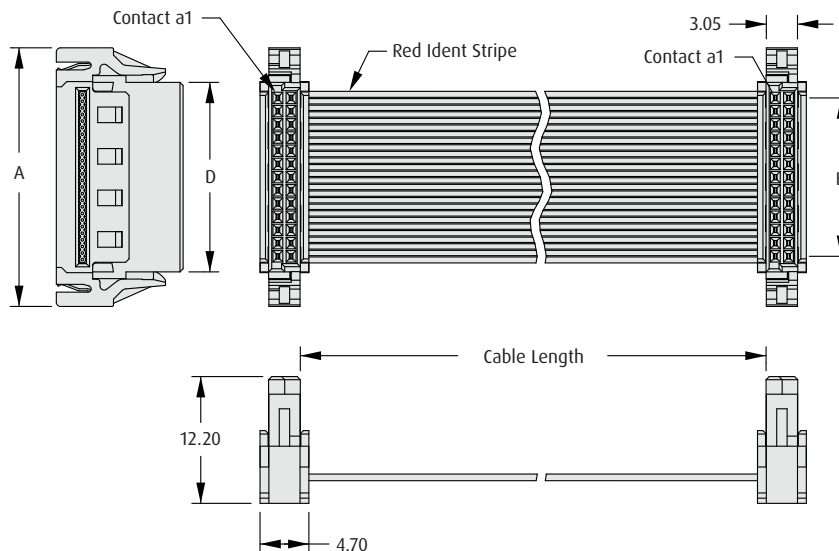

### HOW TO ORDER

**M55 - 800 XX 42 - XXXX - A**

**SERIES CODE**

**TOTAL NO. OF CONTACTS**

12, 16, 20, 26, 32, 40, 50, 68, 80

**CABLE LENGTH**

**0150** 150mm

**0300** 300mm

**FINISH**

**42** Gold + Tin

All dimensions in mm.