


# EMC Shielding - SMT Shield Clip Summary



# EMC Shielding - SMT Shield Clip Summary

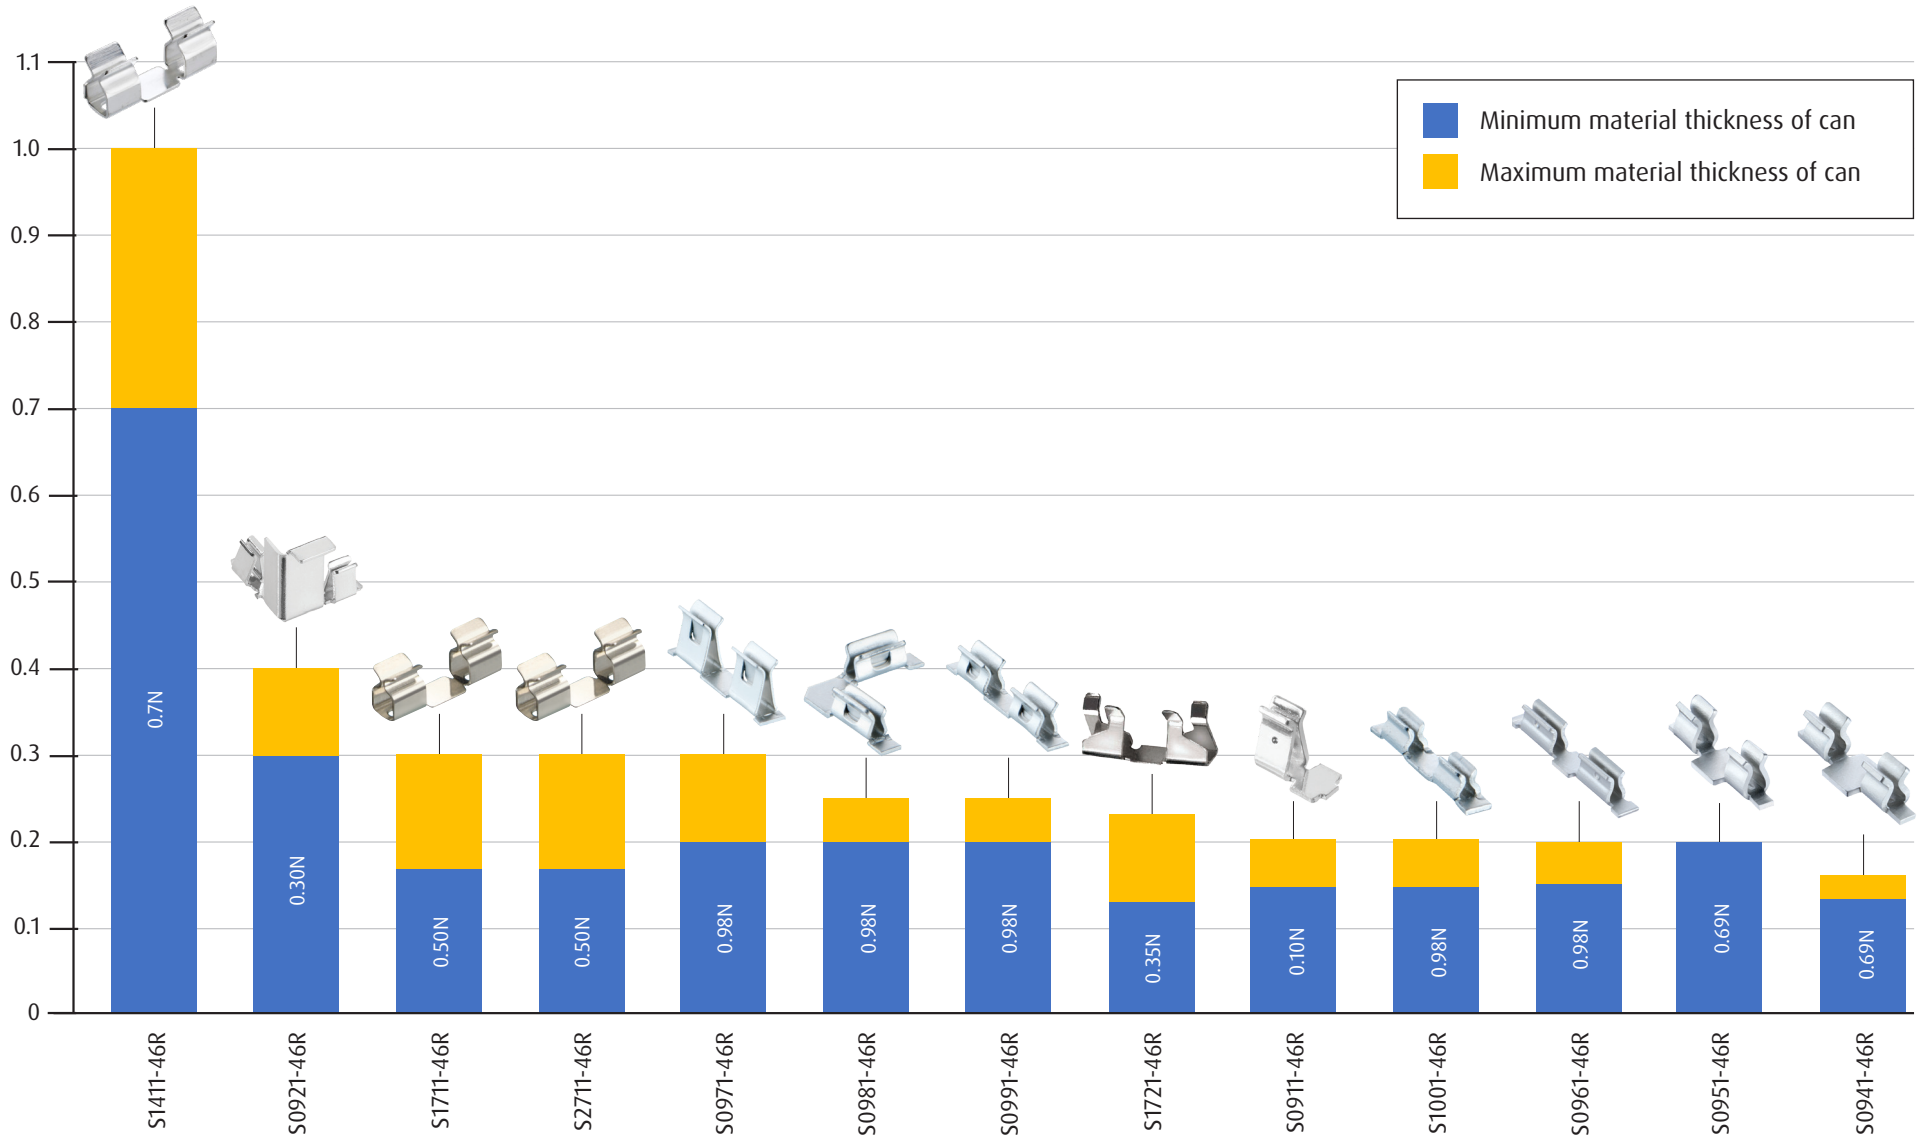

Part Number	Length (mm)	Width (mm)	Height (mm)	Suitable for Can Material Thickness	Base Material	Insertion Force: Max (N)	Withdrawal Force: Min (N)	Finish	Style
S1411-46R	8.79	2.28	3.65	0.70-1.0mm	Beryllium Copper	0.7mm Shield = 4.50 1.0mm Shield = 7.00	0.7mm Shield = 0.80 1.0mm Shield = 1.50	Tin	Maxi
S0921-46R	5.65	5.65	5.45	0.30-0.40mm	Cupro-Nickel	15	0.3	Tin	Corner with Guard
S1711-46R	8.79	2.28	3.55	0.17-0.30mm	Beryllium Copper	4	0.5	Tin	Midi
S2711-46R	8.79	2.28	3.55	0.17-0.30mm	Cupro-Nickel	4	0.5	Tin	Midi
S0971-46R	5.8	1	2	0.20-0.30mm	Stainless Steel	19.6	0.98	Tin	Mini
S0981-46R	4.7	4.7	1.3	0.20-0.25mm	Stainless Steel	19.6	0.98	Tin	Corner
S0991-46R	6.5	1	1.3	0.20-0.25mm	Stainless Steel	19.6	0.98	Tin	Micro
S1721-46R	5.2	1.07	2.23	0.13-0.23mm	Beryllium Copper	5	0.35	Tin	Mini
S0991-46R	6.5	1	1.3	0.20-0.25mm	Stainless Steel	19.6	0.98	Tin	Micro
S1001-46R	4.5	0.7	0.8	0.15-0.20mm	Stainless Steel	19.7	0.98	Tin	Micro
S0961-46R	6.5	1	1.28	0.15-0.20mm	Stainless Steel	24.5	0.98	Tin	Micro
S0951-46R	3.9	1.1	1.28	0.20mm	Stainless Steel	9.8	0.69	Tin	Micro
S0941-46R	3.9	1.1	1	0.135-0.16mm	Stainless Steel	9.8	0.69	Tin	Micro