

Customer Information Sheet

DRAWING No.: G125-FDXXX05FI-XXXXFI


IF IN DOUBT - ASK

©

NOT TO SCALE

THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm

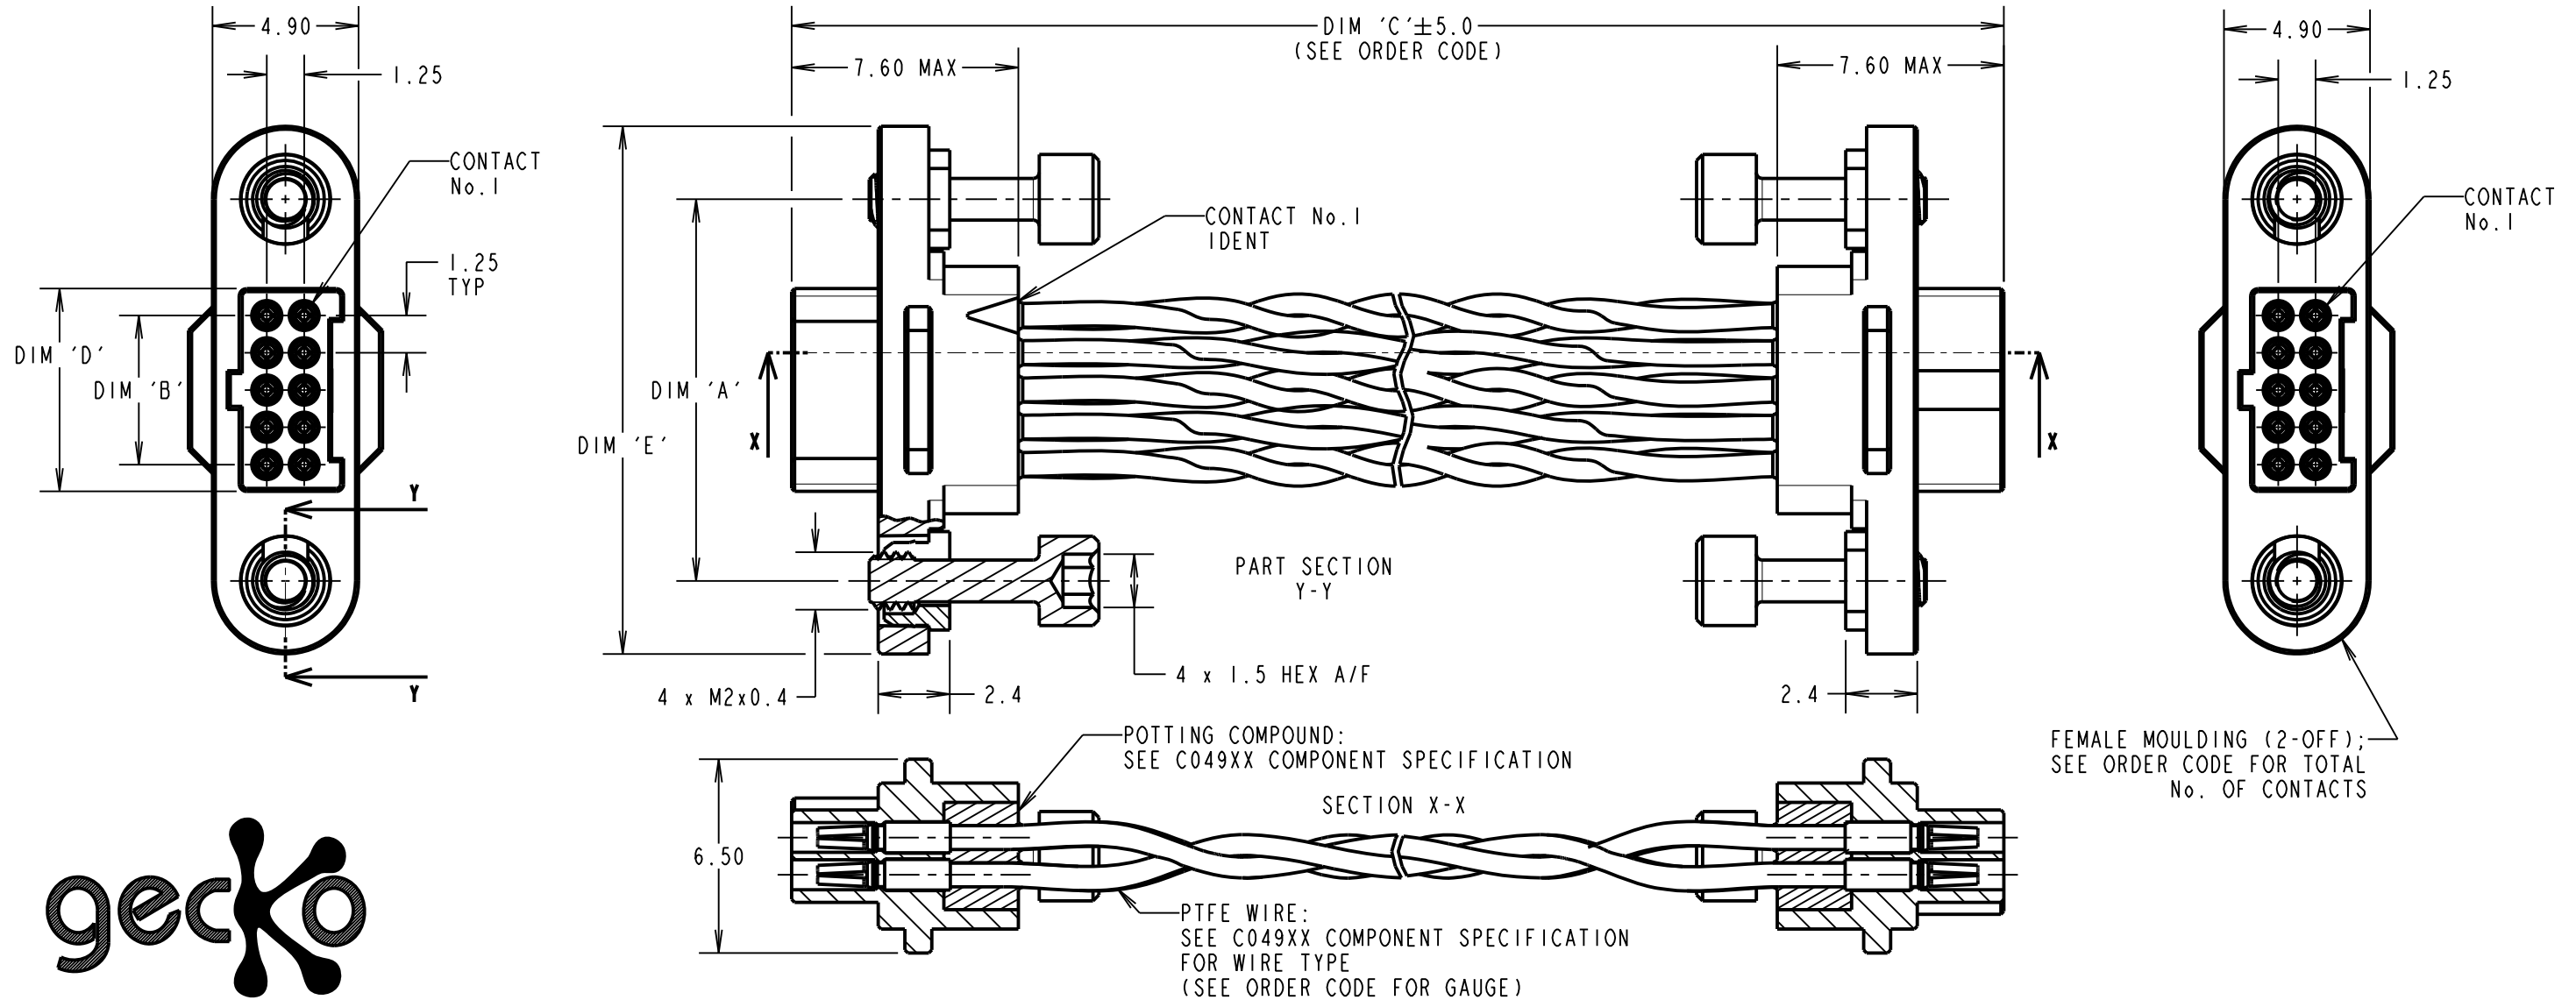

PATENTED TECHNOLOGY

NOTES:

1. CABLE ASSEMBLIES ARE BULK PACKED IN BAGS.
2. CUSTOM LENGTH CABLE ASSEMBLIES CAN BE PRODUCED FROM 60mm TO 9999mm.
3. FOR COMPLETE SPECIFICATION, SEE COMPONENT SPECIFICATIONS C049XX AND C125XX (LATEST ISSUE).
4. WIRING OF CONNECTOR:
CONTACT 1 TO CONTACT 1,
CONTACT 2 TO CONTACT 2, ETC.
SEE TABLE 2 FOR TWISTED PAIR CONFIGURATION.

DIMENSION	MEASUREMENT
DIM 'A'	(TOTAL No. OF CONTACTS - 2) x 0.625 + 7.8
DIM 'B'	(TOTAL No. OF CONTACTS - 2) x 0.625
DIM 'D'	(TOTAL No. OF CONTACTS - 2) x 0.625 + 1.8
DIM 'E'	(TOTAL No. OF CONTACT - 2) x 0.625 + 12.7

WIRING FOR EXAMPLE PART No. G125-FD11005FI-0150FI				
TWISTED PAIR No.	CONNECTOR 1 PIN No.	CONNECTOR 2 PIN No.	TURNS PER INCH	WIRE COLOUR
1	1	1	3	WHITE & GREEN
	6	6		
2	2	2	2	WHITE & RED
	7	7		
3	3	3	3	WHITE & GREEN
	8	8		
4	4	4	2	WHITE & RED
	9	9		
5	5	5	3	WHITE & GREEN
	10	10		

FOR CONNECTORS WITH MORE THAN 10 CONTACTS, CONTINUE TWIST & CABLE PIN OUT CONVENTION IN THE SAME PATTERN. IE. TWISTED PAIR BETWEEN CONTACT X & CONTACT X

ORDER CODE:
G125-FDXXX05FI-XXXXFI

TWISTED PAIR 26 AWG = 1
TWISTED PAIR 28 AWG = 2

DIM 'C' LENGTH:
0060 = 60mm MIN
9999 = 9999mm MAX

TOTAL No. OF CONTACTS:
06, 10, 12, 16,
20, 26, 34, 50

RTP	2	02.12.20	30279
NAME	ISS.	DATE	CN/CO
APPROVED:		R.PORTLOCK	
CHECKED:		M.RUDKIN	
DRAWN:		R.PORTLOCK	
CUSTOMER REF.:			
ASSEMBLY DRG:			

EXAMPLE PART No. :
10 CONTACT CONNECTOR WITH 150mm OF 26AWG WIRE =
G125-FD11005FI-0150FI
50 CONTACT CONNECTOR WITH 450mm OF 28AWG WIRE =
G125-FD25005FI-0450FI

 www.harwin.com technical@harwin.com	THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.	TOLERANCES X. = ±1mm X.X = ±0.50mm X.XX = ±0.20mm X.XXX = ±0.01mm	MATERIAL: SEE ABOVE	TITLE: G125 SERIES DOUBLE-ENDED FEMALE CRIMP CONNECTOR WITH TWISTED PAIR
		ANGLES = ±5° UNLESS STATED	FINISH: SEE ABOVE S/AREA: mm ²	DRAWING NUMBER: G125-FDXXX05FI-XXXXFI