


## Customer Information Sheet

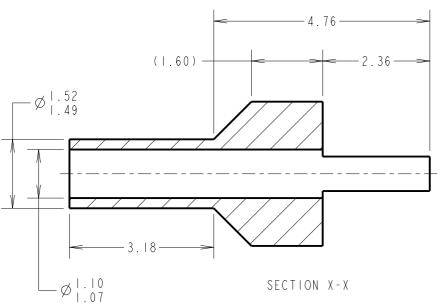





## NOTES:

- I. UNLESS OTHERWISE STATED, TOLERANCES =  $\pm 0.13$ .
- 2. RECOMMENDED PCB HOLE SIZE = Ø1.53-1.61mm.
- 3. RECOMMENDED PCB PANEL THICKNESS = 2.40mm.
- 4. PUNCH & DIE PART NUMBER = Z9067-00.

1 1		1 1	
MGP	17	20.12.22	32164
NAME	ISS.	DATE	CN/CO
APPROVED: MGP			
CHECKED: AB			
DRAWN: J. KEIR			
CUSTOMER REF.:			
ASSEM	MBLY (	)RG:	



www.harwin.com technical@harwin.com THIS DRAWING AND ANY
INFORMATION OR DESCRIPTIVE
MATTER SET OUT HEREON ARE
CONFIDENTIAL AND COPYRIGHT
PROPERTY OF THE HARWIN
GROUP AND MUST NOT BE
DISCLOSED, LOANED, COPIED
OR USED FOR MANUFACTURING,
TENDERING OR FOR ANY
OTHER PURPOSE WITHOUT

THEIR WRITTEN PERMISSION

TOLERANCES MATERIA

= ± Imm
X.X = ±0.50mm
X.XX = ±0.20mm
X.XXX = ±0.01mm
FINISH:

UNLESS STATED S/AREA:

MATERIAL:

ANNEALED BRASS

CW614N M TO BS EN 12164

FINISH: 100% TIN OVER NICKEL

DRAWING NUMBER:

TITLE:

TERMINAL LUG

NG NUMBER: **H9067-01** 

SHT 2 OF 2