


THIS SKETCH IS FOR QUOTATION
PURPOSES ONLY

FINISH
(TICK APPLICABLE):

100% TIN

GOLD

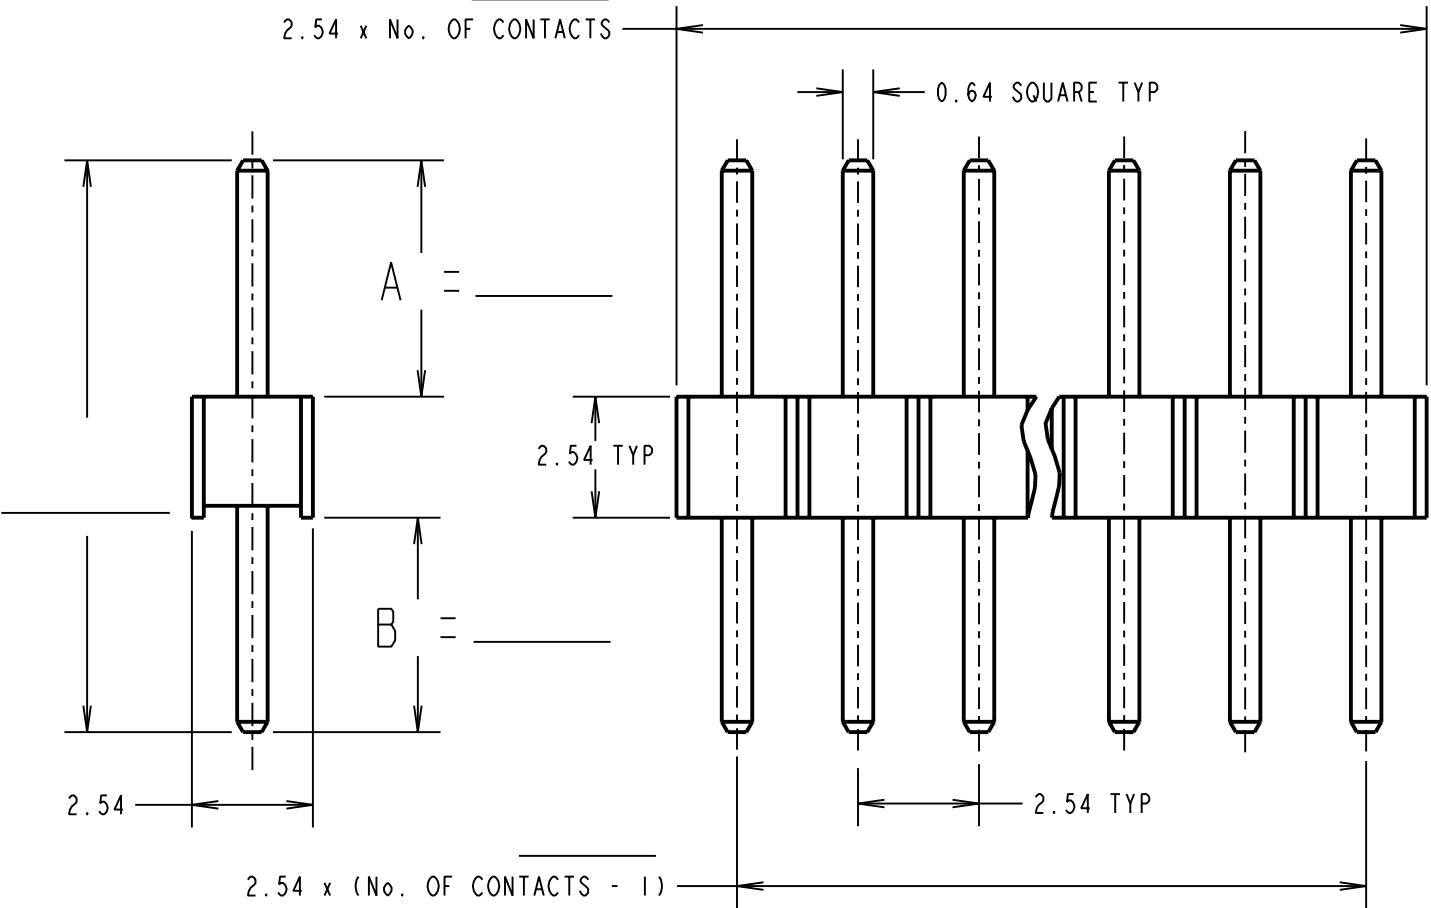

- NOTES:
1. MAXIMUM PERMISSIBLE OUT OF SQUARE OF PIN TO MOULDING TO BE 0.10mm IN ANY DIRECTION.
 2. CONTACT LEG VARIATION ON COMPLETE ASSEMBLY NOT TO EXCEED 0.10mm.

SPECIFICATION:

MATERIAL:
MOULDING = HIGH TEMPERATURE
 NYLON 6T, UL94V-0, BLACK

PINS = BRASS

FINISH:
PINS: SEE BOX ABOVE

ELECTRICAL:
CURRENT RATING = 3A MAX
CONTACT RESISTANCE = 30 mΩ MAX
INSULATION RESISTANCE = 10,000 MΩ MIN
DIELECTRIC STRENGTH = 750V AC/DC

ENVIRONMENTAL:
TEMPERATURE RANGE = -40°C TO +105°C

PACKING:
BAG

DATE OF SKETCH:
REQUESTED BY:
No. OF CONTACTS PER ROW: