


NOTES:

1. MAXIMUM PERMISSIBLE OUT OF SQUARE OF PIN TO MOULDING TO BE 0.10mm IN ANY DIRECTION.
2. CONTACT LEG VARIATION ON COMPLETE ASSEMBLY NOT TO EXCEED 0.10mm.

THIS SKETCH IS FOR QUOTATION PURPOSES ONLY

FINISH  
(TICK APPLICABLE):

- 100% TIN
- GOLD

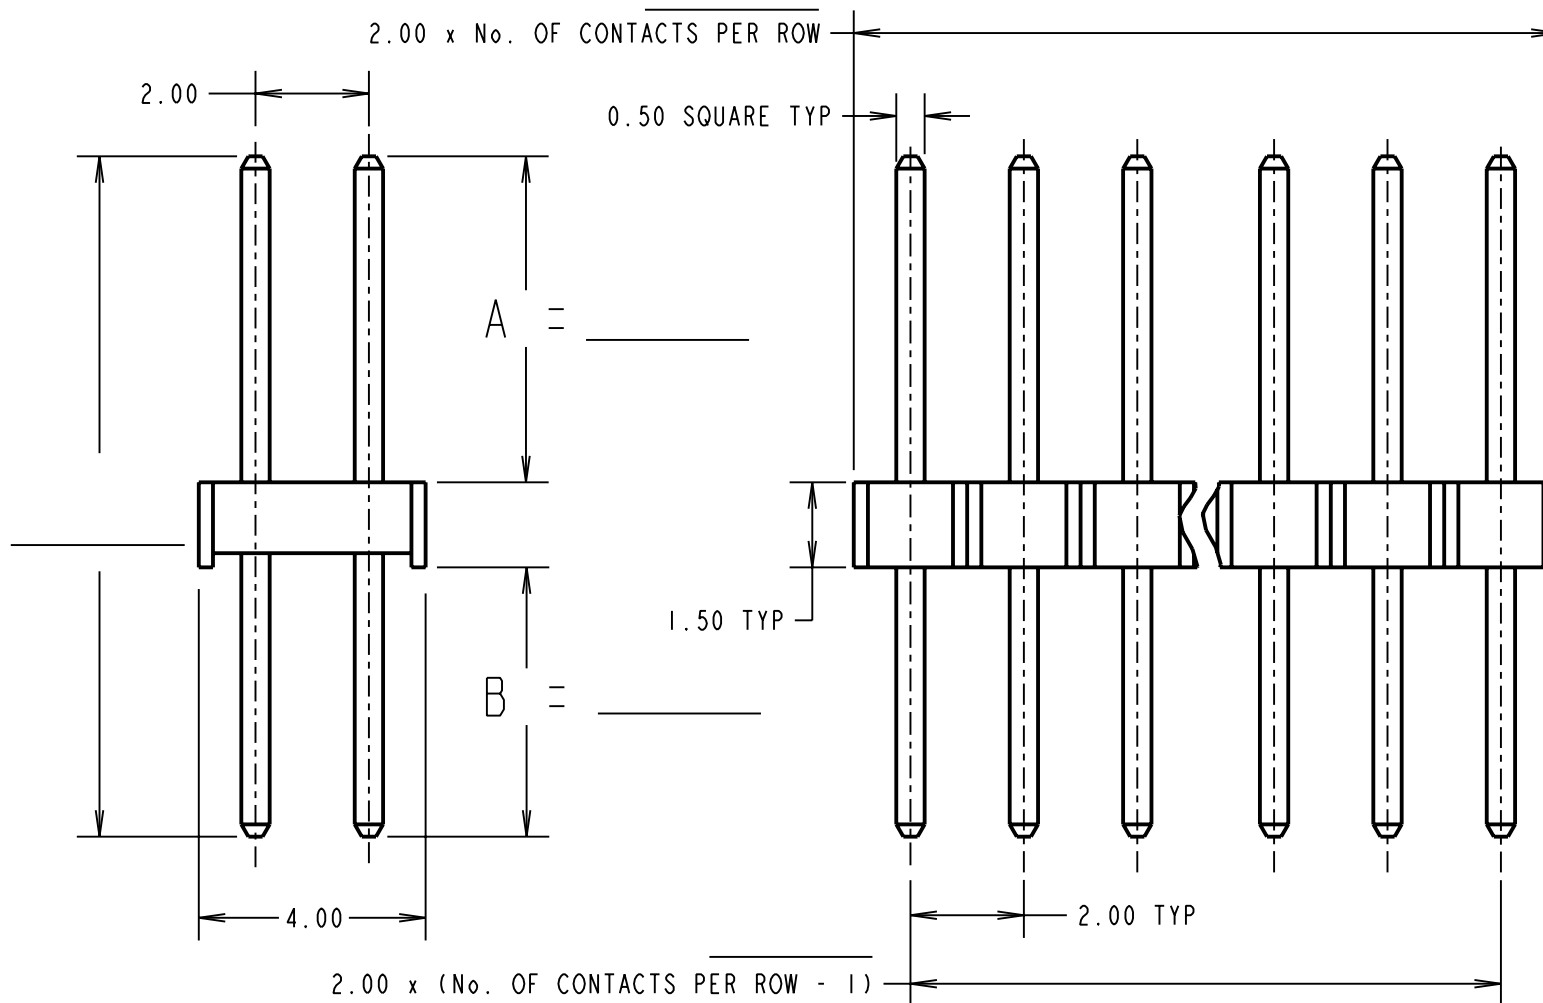

SPECIFICATION:

MATERIAL:  
 MOULDING = HIGH TEMPERATURE NYLON  
 6T,UL94V-0, BLACK  
 PINS = PHOSPHOR BRONZE  
 FINISH:  
 PINS: SEE BOX  
 ELECTRICAL:  
 CURRENT RATING = 1A MAX  
 CONTACT RESISTANCE = 30 mΩ MAX  
 INSULATION RESISTANCE = 100 MΩ MIN  
 DIELECTRIC STRENGTH = 650V AC/DC  
 ENVIRONMENTAL:  
 TEMPERATURE RANGE = -40°C TO +105°C  
 PACKING:  
 BAG

DATE OF SKETCH:

REQUESTED BY:

No. OF CONTACTS  
PER ROW:

**HARWIN**

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES

X. = ±1mm  
 X.X = ±0.25mm  
 X.XX = ±0.10mm  
 X.XXX = ±0.01mm

ANGLES = ±5°  
 UNLESS STATED

TITLE:

2.00mm PITCH DIL EXTENDED  
 PC TAIL PIN HEADER VARIANT

DRAWING No.:

M22 - \_\_\_\_\_ W \_\_\_\_\_

HARWIN INC  
 U.S.A.  
 TEL: (812) 542 2540  
 FAX: (812) 542 2541

HARWIN PLC  
 U.K.  
 TEL: 023 9231 4545  
 FAX: 023 9231 4590

HARWIN PTE  
 SINGAPORE  
 TEL: 65 6779 4909  
 FAX: 65 6779 3868