


Datamate J-Tek Connectors

Female Crimp Kit - Extra Small Bore

- Part numbers are for a complete kit of a housing and the applicable number of contacts.
- Jackscrews are assembled where specified.
- Crimp contacts are rear insertable.
- Versions also available for 22 - 28 AWG cable - see the previous page.
- Spare contacts are available.

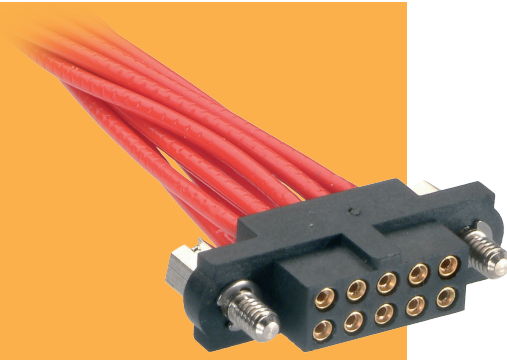

DATAMATE J-TEK

WITHOUT JACKSCREWS	WITH JACKSCREWS								
<table border="1" style="width: 100%;"> <thead> <tr> <th colspan="2" style="background-color: #f4a460;">CALCULATION</th> </tr> </thead> <tbody> <tr> <td style="width: 20px;">A</td> <td>$B + 12$</td> </tr> <tr> <td>B</td> <td>Total no. of contacts - 2</td> </tr> <tr> <td>C</td> <td>$B + 7$</td> </tr> </tbody> </table>		CALCULATION		A	$B + 12$	B	Total no. of contacts - 2	C	$B + 7$
CALCULATION									
A	$B + 12$								
B	Total no. of contacts - 2								
C	$B + 7$								
	<p style="text-align: center;">Hex Slotted Jackscrew Hex Socket Jackscrew</p>								

TOOLS	WIRE STRIPPING DETAILS
<p>Recommended Crimp Tool - M22520/2-01</p> <p>Positioner - T5747</p> <p>Contact Insertion/Removal Tool - Z80-280</p> <ul style="list-style-type: none"> Spare and pre-cabled contacts shown on following pages. Instruction sheets available at www.harwin.com/instructions. 	

HOW TO ORDER

M80 - 4 E1 XX XX FX

SERIES CODE		JACKSCREW	
TYPE		00	Without Jackscrews
E1	Extra Small Bore 28-32 AWG	F1	With Hex Slotted Jackscrews
TOTAL NO. OF CONTACTS	04, 06, 08, 10, 12, 14, 20, 26, 34, 42, 50	F2	With Hex Socket Jackscrews
		FINISH	
		05	Gold
		42	Gold + Tin

All dimensions in mm.