


# Datamate J-Tek Connectors

DATAMATE J-TEK

## Male Horizontal Surface Mount

- Stamped contact ensures co-planarity.
- Board Mount provides PCB strain relief.
- Mates with female Datamate J-Tek connectors with compatible jackscrews.

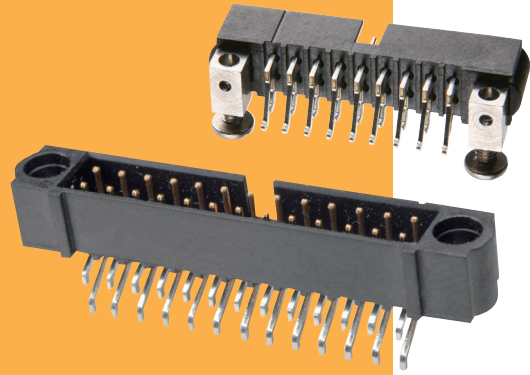

WITHOUT JACKSCREWS		WITH JACKSCREWS		WITH BOARD MOUNT															
				<p><b>Board Mount Bolt, 2 per connector</b></p>															
<p><b>RECOMMENDED PC BOARD PATTERN</b></p>		<p><b>CALCULATION</b></p> <table border="1"> <tr> <td><b>A</b></td> <td><math>B + 12</math></td> </tr> <tr> <td><b>B</b></td> <td>Total no. of contacts - 2</td> </tr> <tr> <td><b>C</b></td> <td><math>B + 7</math></td> </tr> </table>		<b>A</b>	$B + 12$	<b>B</b>	Total no. of contacts - 2	<b>C</b>	$B + 7$										
<b>A</b>	$B + 12$																		
<b>B</b>	Total no. of contacts - 2																		
<b>C</b>	$B + 7$																		
<b>HOW TO ORDER</b>																			
<b>M80 - 5 XX XX XX</b>																			
<p><b>SERIES CODE</b></p> <table border="1"> <tr> <th>TYPE</th> <th></th> </tr> <tr> <td>32</td> <td>With Jackscrews</td> </tr> <tr> <td>42</td> <td>With 3.5mm Board Mount</td> </tr> <tr> <td>43</td> <td>With 5mm Board Mount</td> </tr> <tr> <td>52</td> <td>Without Jackscrews</td> </tr> </table>		TYPE		32	With Jackscrews	42	With 3.5mm Board Mount	43	With 5mm Board Mount	52	Without Jackscrews			<p><b>FINISH</b></p> <table border="1"> <tr> <td>05</td> <td>Gold</td> </tr> <tr> <td>42</td> <td>Gold + Tin</td> </tr> </table>		05	Gold	42	Gold + Tin
TYPE																			
32	With Jackscrews																		
42	With 3.5mm Board Mount																		
43	With 5mm Board Mount																		
52	Without Jackscrews																		
05	Gold																		
42	Gold + Tin																		
				<p><b>TOTAL NO. OF CONTACTS</b></p> <p>04, 06, 08, 10, 12, 14, 20, 26, 34, 42, 50</p>															

All dimensions in mm.