

# Gecko Connectors Introduction

Gecko is a 1.25mm pitch High-Reliability connector range from Harwin. Improving on the popular 2mm pitch Datamate series, and harnessing the modern technology of micro-machining, this range brings the best of the high-reliability specifications to a smaller size.

Gecko provides a low-profile, dual-row solution for all variations of cable-to-board, board-to-board and cable-to-cable interconnect requirements. With up to 50 contacts per connector, but still capable of 2A per contact, Gecko gives both significant weight and space-saving advantages over Micro-D connections. The Gecko range offers either latching connectors, for maximum weight and space-saving, or Screw-Lok connectors for maximum mating strain relief.

- ❖ 2A per contact (all electrically loaded; 2.8A per individual contact)
- ❖ 4-finger Patented\* contact design to maintain electrical contact through high vibration and shock
- ❖ Beryllium Copper Contact for improved temperature range: -65°C to +150°C
- ❖ 1,000 Mating cycles durability
- ❖ Weight and Space-saving over Micro-D connector products
- ❖ Future-proofed Materials - Halogen-free, PFOS-free, SVHC-free and RoHS compliant
- ❖ Low outgassing properties - 0.68% TML, 0.01% CVCM, 0.26 WVR (Water Vapour Recovered)
- ❖ All PCB connectors available in Tape and Reel for automation


\*Granted US9017089, Pending GB2501063, Pending EP2642604

## Gecko Screw-Lok

- ❖ Strong stainless-steel screw fixings for maximum strain relief
- ❖ Lightweight hoods for additional cable protection and shielding
- ❖ Pre-wired contacts available for prototyping and pre-production

## Gecko with Latches

- ❖ The maximum weight and space saving, designed with lightweight robust latches for minimal PCB real estate
- ❖ Product range includes complete cable assemblies, ideal for prototyping and pre-production

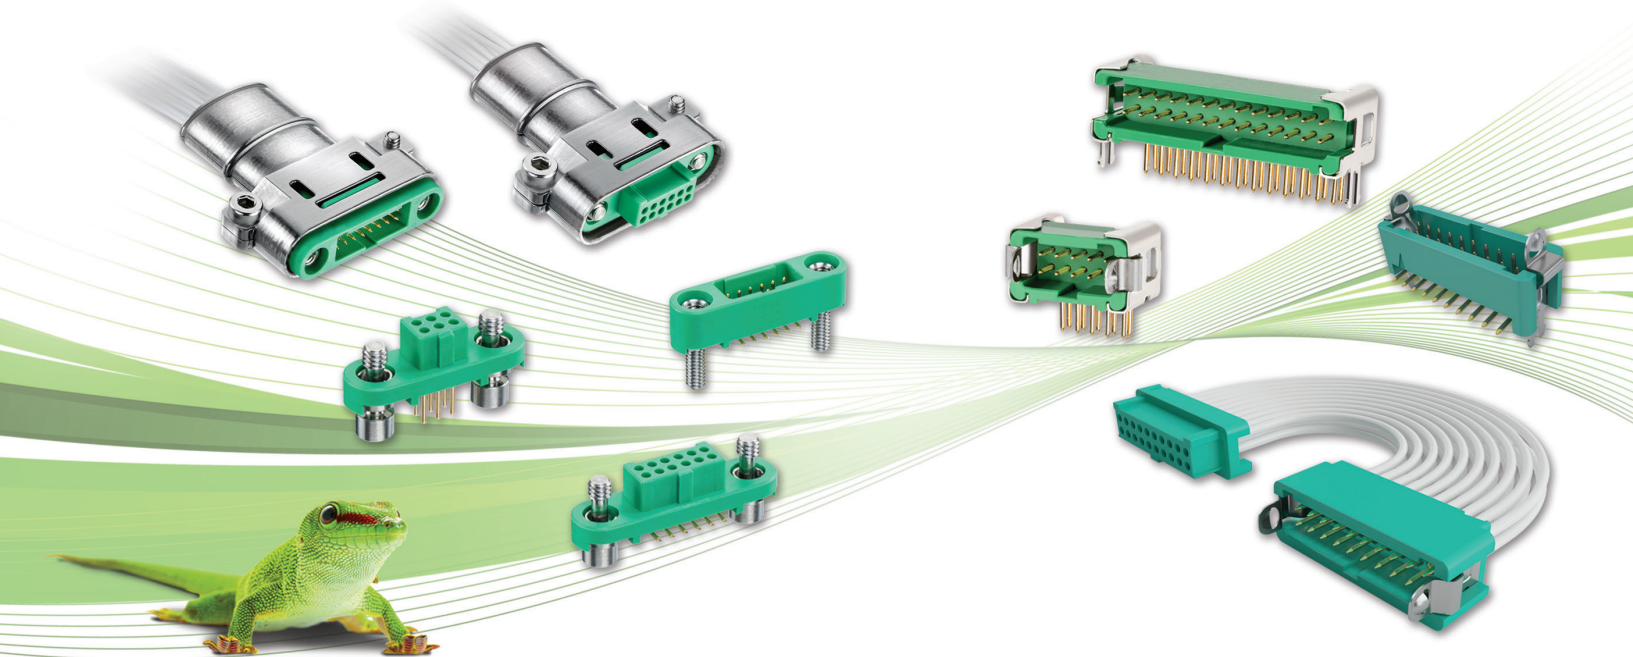

Patent Published