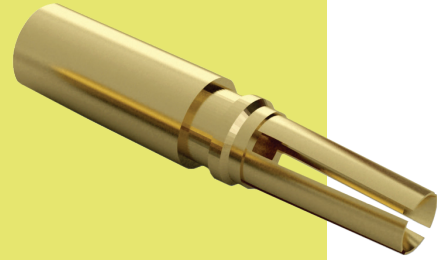





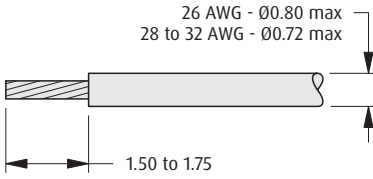
Gecko-SL Connectors

GECKO-SL

Female Crimp Contacts, Dummy Contact

- ❖ 4-finger Beryllium Copper contact on a female connector.
- ❖ Crimp barrel meets all crimp guidelines and standards.
- ❖ 2A current capacity, resists high vibration and shock.
- ❖ Withstands extremes of temperature: -65°C to +150°C.
- ❖ Instruction video online at www.harwin.com/harwintv.
- ❖ Dummy Contact can be used for additional polarization of keying of multiple connectors. Also called Blanking Plug.



CONTACTS	DUMMY CONTACT												
<p>26 AWG</p> 													
<p>28 - 32 AWG</p> 	<p>WIRE STRIPPING DETAILS</p> 												
<p>TOOLS</p>													
<p>Recommended Crimp Tool - Z125-900 Positioner - Z125-901 Contact Insertion/Removal Tool - Z125-902</p>	<ul style="list-style-type: none"> ❖ Female crimp housings shown on previous pages. ❖ Pre-cabled contacts shown on following page. ❖ Instruction sheets available at www.harwin.com/instructions. 												
<p>HOW TO ORDER</p>													
<p style="text-align: center;">G125 - 0XX 00 05</p> <div style="display: flex; justify-content: space-between;"> <div data-bbox="147 1629 318 1667" style="border: 1px solid black; padding: 2px;"> <p>SERIES CODE</p> </div> <div data-bbox="147 1703 581 1856" style="border: 1px solid black; padding: 2px;"> <table border="1"> <thead> <tr> <th colspan="2">TYPE</th> </tr> </thead> <tbody> <tr> <td>001</td> <td>Female 26 AWG crimp contact</td> </tr> <tr> <td>002</td> <td>Female 28-32 AWG crimp contact</td> </tr> <tr> <td>020</td> <td>Dummy Contact (blanking plug)</td> </tr> </tbody> </table> </div> <div data-bbox="1317 1686 1471 1761" style="border: 1px solid black; padding: 2px;"> <table border="1"> <thead> <tr> <th colspan="2">FINISH</th> </tr> </thead> <tbody> <tr> <td>05</td> <td>Gold</td> </tr> </tbody> </table> </div> </div>		TYPE		001	Female 26 AWG crimp contact	002	Female 28-32 AWG crimp contact	020	Dummy Contact (blanking plug)	FINISH		05	Gold
TYPE													
001	Female 26 AWG crimp contact												
002	Female 28-32 AWG crimp contact												
020	Dummy Contact (blanking plug)												
FINISH													
05	Gold												

All dimensions in mm.

Patent Published