


Gecko Screw-Lok Connectors

GECKO SCREW-LOK

Male Crimp Contacts – Pre-Crimped Wires

- Ready for assembling to housing.
- Crimp barrel meets all crimp guidelines and standards.
- 2A current capacity, resists high vibration and shock.
- Withstands extremes of temperature: -65°C to +150°C.

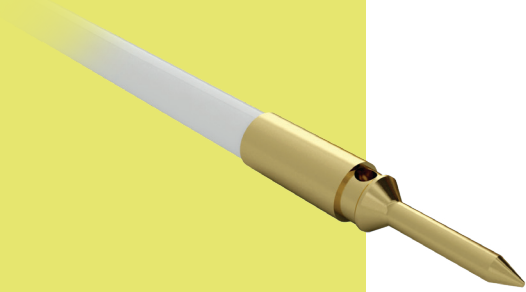

| | |
|--------------------------|--|
| MALE SINGLE ENDED | MALE – MALE |
| | |
| MALE – FEMALE | TOOLS |
| | <p>Contact Insertion/Removal Tool – Z125-902</p> <ul style="list-style-type: none"> ➤ Male crimp housings and loose contacts shown on previous pages. ➤ Instruction sheets available at www.harwin.com/instructions. |

HOW TO ORDER

G125 – M WX XXXX X 94

SERIES CODE

| CABLE COLOR | |
|-------------|-------|
| 94 | White |

| GENDER – FIRST END | |
|--------------------|------|
| M | Male |

| TERMINATION – SECOND END | |
|--------------------------|---------------|
| L | Loose cut end |
| F | Female |
| M | Male |

| CABLE SIZE | |
|------------|--------|
| W1 | 26 AWG |
| W2 | 28 AWG |
| W3 | 30 AWG |

| CABLE LENGTH | |
|--------------|----------------------|
| 0150 | 150mm |
| 0300 | 300mm (double-ended) |
| 0450 | 450mm (single-ended) |

All dimensions in mm.

Patent Published