


Gecko with Latches Connectors

Female Crimp Contacts, Dummy Contact

- ❖ 4-finger Beryllium Copper contact on a female connector.
- ❖ Crimp barrel meets all crimp guidelines and standards.
- ❖ 2A current capacity, resists high vibration and shock.
- ❖ Withstands extremes of temperature: -65°C to +150°C.
- ❖ Instruction video online at www.harwin.com/harwintv.
- ❖ Dummy Contact can be used for additional polarization of keying of multiple connectors. Also called Blanking Plug.

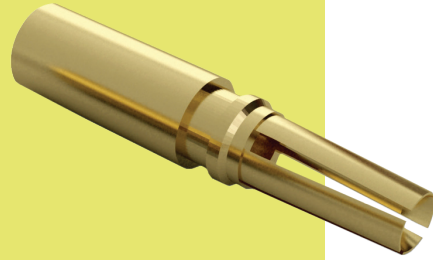

CONTACTS	DUMMY CONTACT								
<p>26 AWG</p>									
<p>28 - 32 AWG</p>	<p style="background-color: #e6f2ff; text-align: center;">WIRE STRIPPING DETAILS</p>								
TOOLS									
<p>Recommended Crimp Tool - Z125-900</p> <p>Positioner - Z125-901</p> <p>Contact Insertion/Removal Tool - Z125-902</p>	<ul style="list-style-type: none"> ❖ Female crimp housing shown on previous page. ❖ Pre-cabled contacts shown on following page. ❖ Instruction sheets available at www.harwin.com/instructions. 								
HOW TO ORDER									
<p>G125 - 0XX 00 05</p>									
<p>SERIES CODE</p>	<p>FINISH</p> <table border="1"> <tr> <td>05</td> <td>Gold</td> </tr> </table>	05	Gold						
05	Gold								
<table border="1"> <thead> <tr> <th colspan="2" style="background-color: #e6f2ff;">TYPE</th> </tr> </thead> <tbody> <tr> <td>001</td> <td>Female 26 AWG crimp contact</td> </tr> <tr> <td>002</td> <td>Female 28-32 AWG crimp contact</td> </tr> <tr> <td>020</td> <td>Dummy Contact (blanking plug)</td> </tr> </tbody> </table>	TYPE		001	Female 26 AWG crimp contact	002	Female 28-32 AWG crimp contact	020	Dummy Contact (blanking plug)	
TYPE									
001	Female 26 AWG crimp contact								
002	Female 28-32 AWG crimp contact								
020	Dummy Contact (blanking plug)								

All dimensions in mm.

Patent Published