


# Gecko with Latches Connectors

## Female Crimp Contacts – Pre-Crimped Wires

- ❖ 4-finger Beryllium Copper contact.
- ❖ Ready for assembling to housing.
- ❖ Crimp barrel meets all crimp guidelines and standards.
- ❖ 2A current capacity, resists high vibration and shock.
- ❖ Withstands extremes of temperature: -65°C to +150°C.

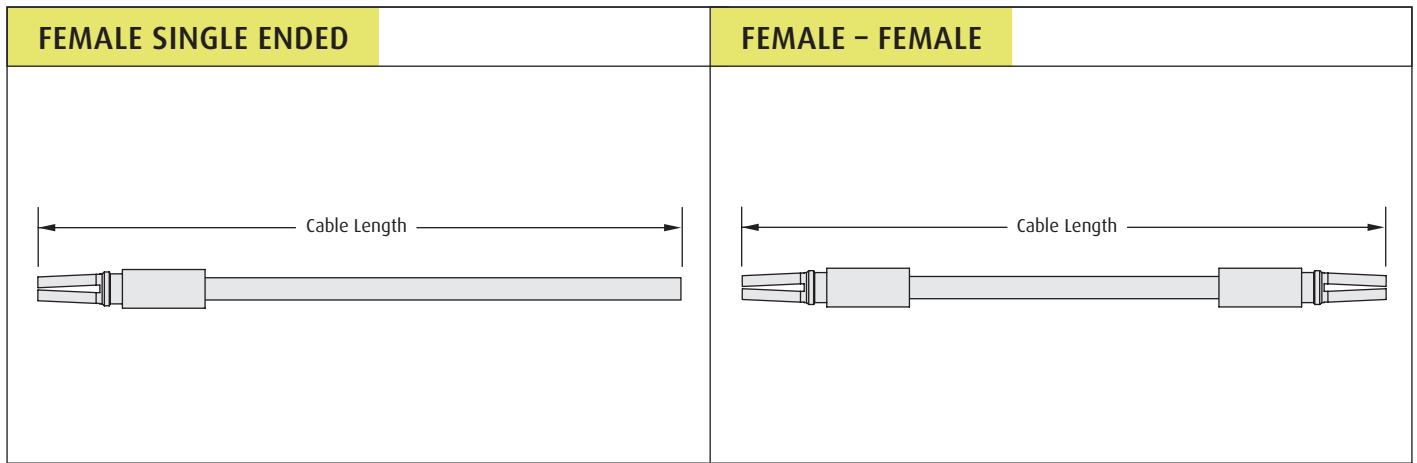


### TOOLS

**Contact Insertion/Removal Tool** – Z125-902

- ❖ Female crimp housing and loose contacts shown on previous pages.
- ❖ Full Cable assemblies shown on following page.
- ❖ Instruction sheets available at [www.harwin.com/instructions](http://www.harwin.com/instructions).

### HOW TO ORDER

**G125 – F WX XXXX X 94**

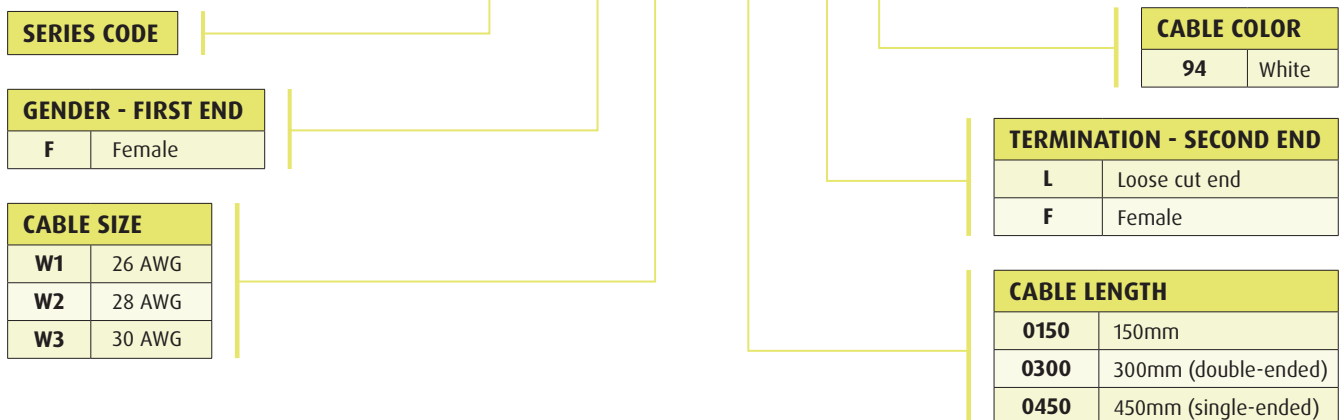

All dimensions in mm.

Patent Published