


Gecko with Latches Connectors

Female Cable Assemblies

- ❖ 4-finger Beryllium Copper contact.
- ❖ No. 1 position identified on housing.
- ❖ 2A current capacity, resists high vibration and shock.
- ❖ Withstands extremes of temperature: -65°C to +150°C.
- ❖ Back potted for added strain relief.
- ❖ Check website or Ask an Expert for available combinations.

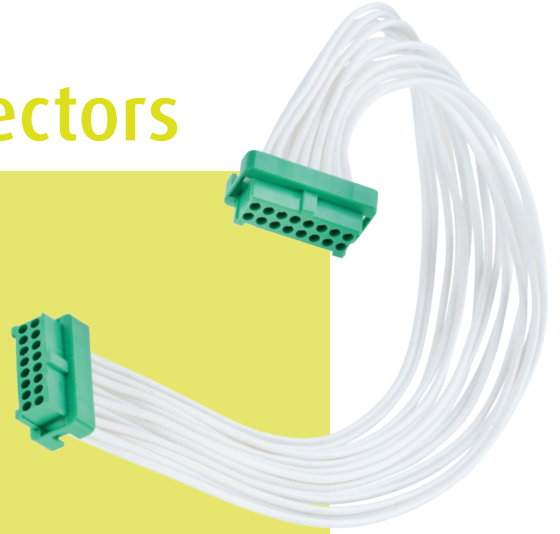

GECKO WITH LATCHES

PART NUMBERING SYSTEM

G125 - F X X XX XX LO - XXXX X

SERIES CODE

GENDER - FIRST END

F	Female
----------	--------

CABLE STYLE

C	Standard Cables
D	Twisted Pairs

CABLE SIZE

1	26 AWG
2	28 AWG
3	30 AWG

TOTAL NO. OF CONTACTS

06, 10, 12, 16, 20, 26, 34, 50

TERMINATION - SECOND END

L	Loose cut end
F	Female connector

CABLE LENGTH

0150	150mm
0300	300mm (double-ended)
0450	450mm (single-ended)
XXXX	XXXXmm

LATCHES

LO	No Latches
-----------	------------


CABLE COLOR

05	White cable
68	Multicolor cable (single-ended)


Gecko with Latches Connectors

- ❖ Examples of available cable assembly options - see previous page for part numbering.
- ❖ Cable assemblies are constructed with Contact 1 attached to Contact 1, Contact 2 to Contact 2, etc.
- ❖ Twisted Pairs are 2 twists per inch and 3 twists per inch, alternated along the conductor.

FEMALE SINGLE ENDED

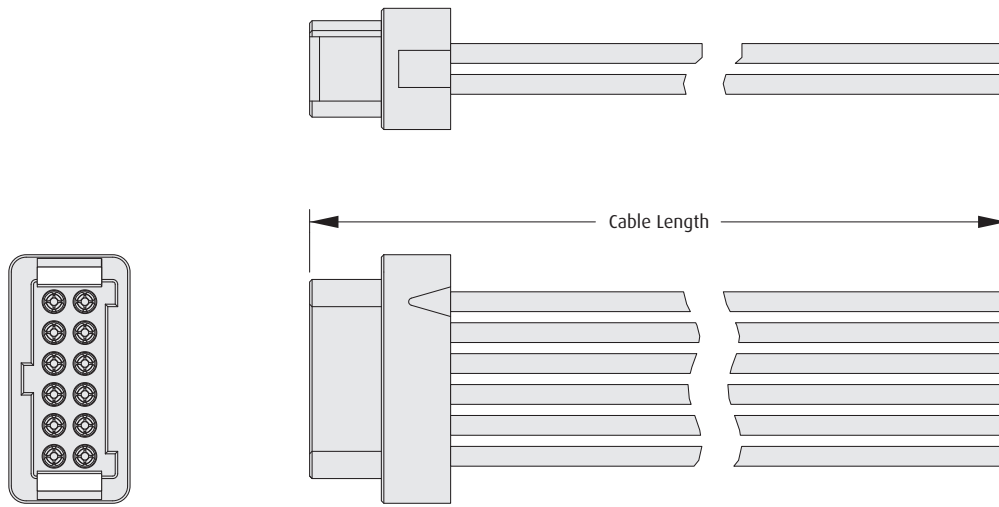

FEMALE - FEMALE WITH TWISTED PAIRS

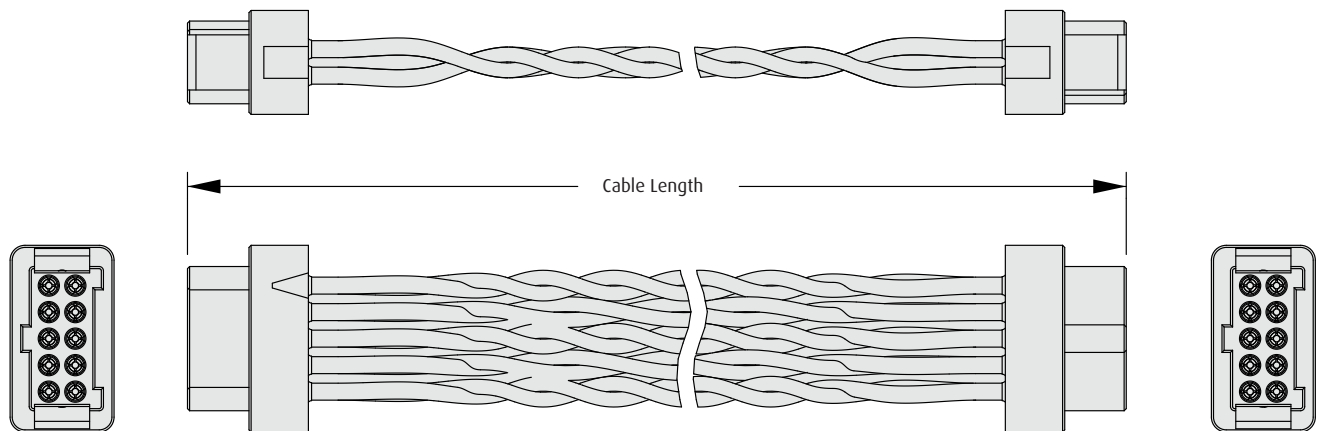

All dimensions in mm.

Patent Published