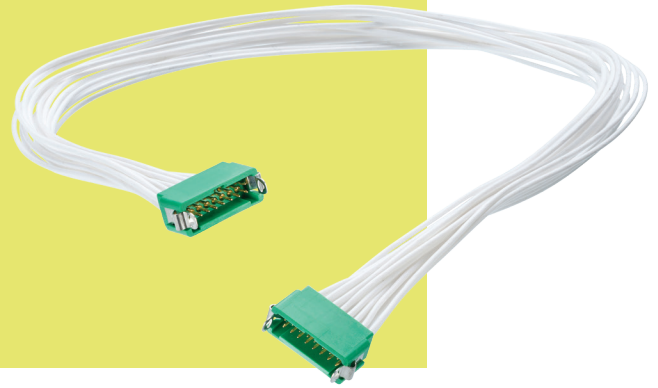


Gecko with Latches Connectors

Male Cable Assemblies

- ❖ No. 1 position identified on housing.
- ❖ 2A current capacity, resists high vibration and shock.
- ❖ Withstands extremes of temperature: -65°C to +150°C.
- ❖ Back potted for added strain relief.
- ❖ 4-finger Beryllium Copper contact on the female connector.



GECKO WITH LATCHES

PART NUMBERING SYSTEM

G125 - M C X XX 05 LX - XXXX X

SERIES CODE

GENDER - FIRST END

M	Male
----------	------

CABLE SIZE

1	26 AWG
2	28 AWG
3	30 AWG

TOTAL NO. OF CONTACTS

06, 10, 12, 16, 20, 26, 34, 50

TERMINATION - SECOND END

L	Loose cut end
F	Female connector
M	Male connector

CABLE LENGTH

0150	150mm
0300	300mm (double-ended)
0450	450mm (single-ended)

LATCHES


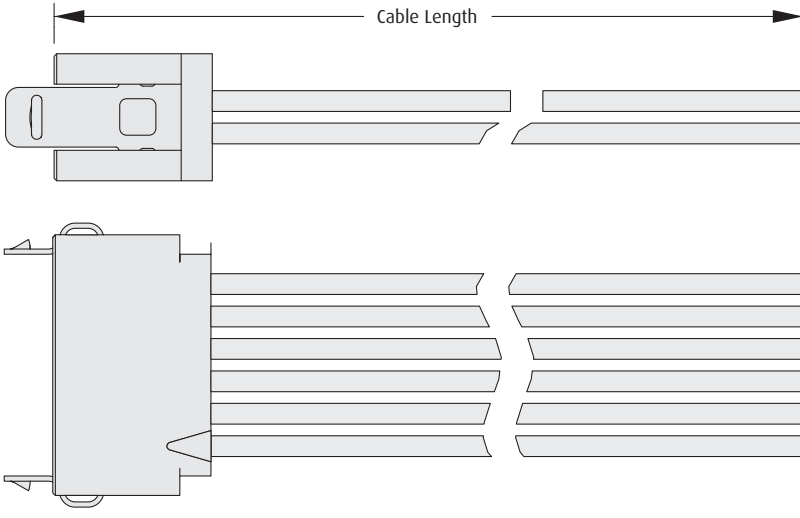
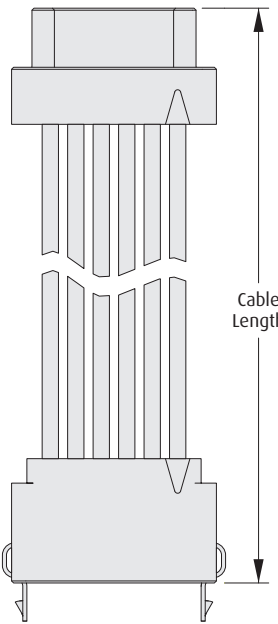
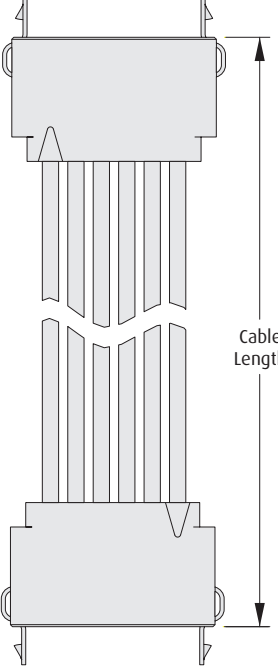
L0	No Latches
L4	Latches (male connectors only)

FINISH

05	Gold
-----------	------

Male Cable Assemblies

- ❖ See previous page for cable length options.
- ❖ Cable assemblies are constructed with Contact 1 attached to Contact 1, Contact 2 to Contact 2, etc.

MALE SINGLE ENDED					
 <p>No. 1 contact</p>	 <p>Cable Length</p>				
<table border="1" style="width: 100%;"> <tr> <th style="background-color: #f0f0f0;">ORDER CODE</th> </tr> <tr> <td>G125-MCXXX05LX-XXXXL</td> </tr> </table>		ORDER CODE	G125-MCXXX05LX-XXXXL		
ORDER CODE					
G125-MCXXX05LX-XXXXL					
MALE - FEMALE	MALE - MALE				
 <p>Cable Length</p>	 <p>Cable Length</p>				
<table border="1" style="width: 100%;"> <tr> <th style="background-color: #f0f0f0;">ORDER CODE</th> </tr> <tr> <td>G125-MCXXX05LX-XXXXF</td> </tr> </table>	ORDER CODE	G125-MCXXX05LX-XXXXF	<table border="1" style="width: 100%;"> <tr> <th style="background-color: #f0f0f0;">ORDER CODE</th> </tr> <tr> <td>G125-MCXXX05LX-XXXXM</td> </tr> </table>	ORDER CODE	G125-MCXXX05LX-XXXXM
ORDER CODE					
G125-MCXXX05LX-XXXXF					
ORDER CODE					
G125-MCXXX05LX-XXXXM					

All dimensions in mm.

Patent Published