Datamate Power Connectors

Female Cable Assemblies

- Fully assembled connectors, fixings and cable in standard configurations.
- Standard Power contacts are rated to 20A, and are fitted with 12AWG, white PTFE-insulated cables.
- High Power are rated to 40A nominal, up to 80A max. Fitted with 10AWG, white PTFE-insulated cables.

STANDARD POWER

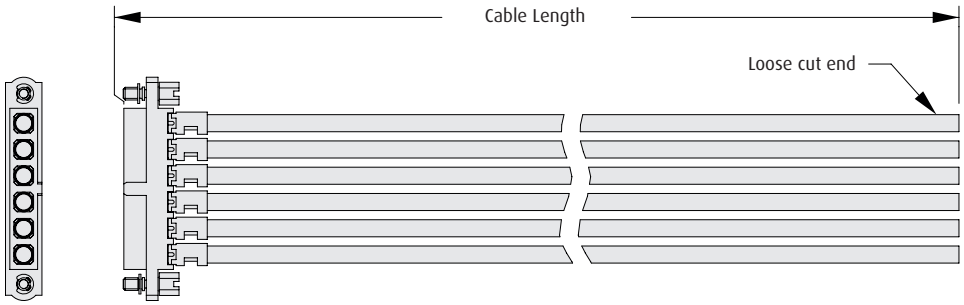

HIGH POWER

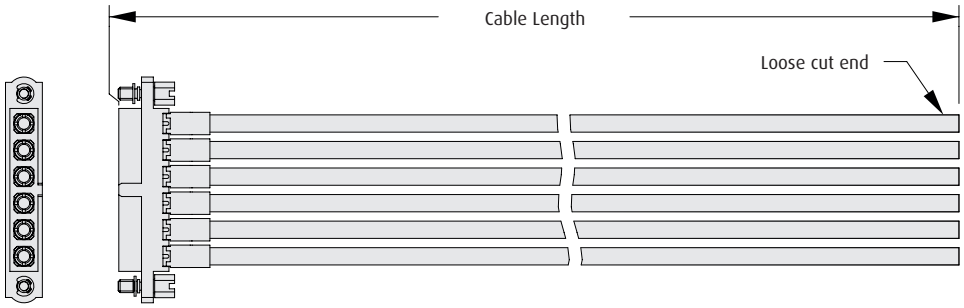

HOW TO ORDER

M80 - FC XXX F1 - XX - 0150 L

SERIES CODE

POWER CONTACTS PART NO.

325	Standard Power
PF5	High Power

JACKSCREW

F1	Hex Slotted Jackscrews

NO. OF POWER CONTACTS

02, 04, 06, 08

CABLE LENGTH

0150	150mm

TERMINATION - SECOND END

L	Loose cut end

All dimensions in mm.