
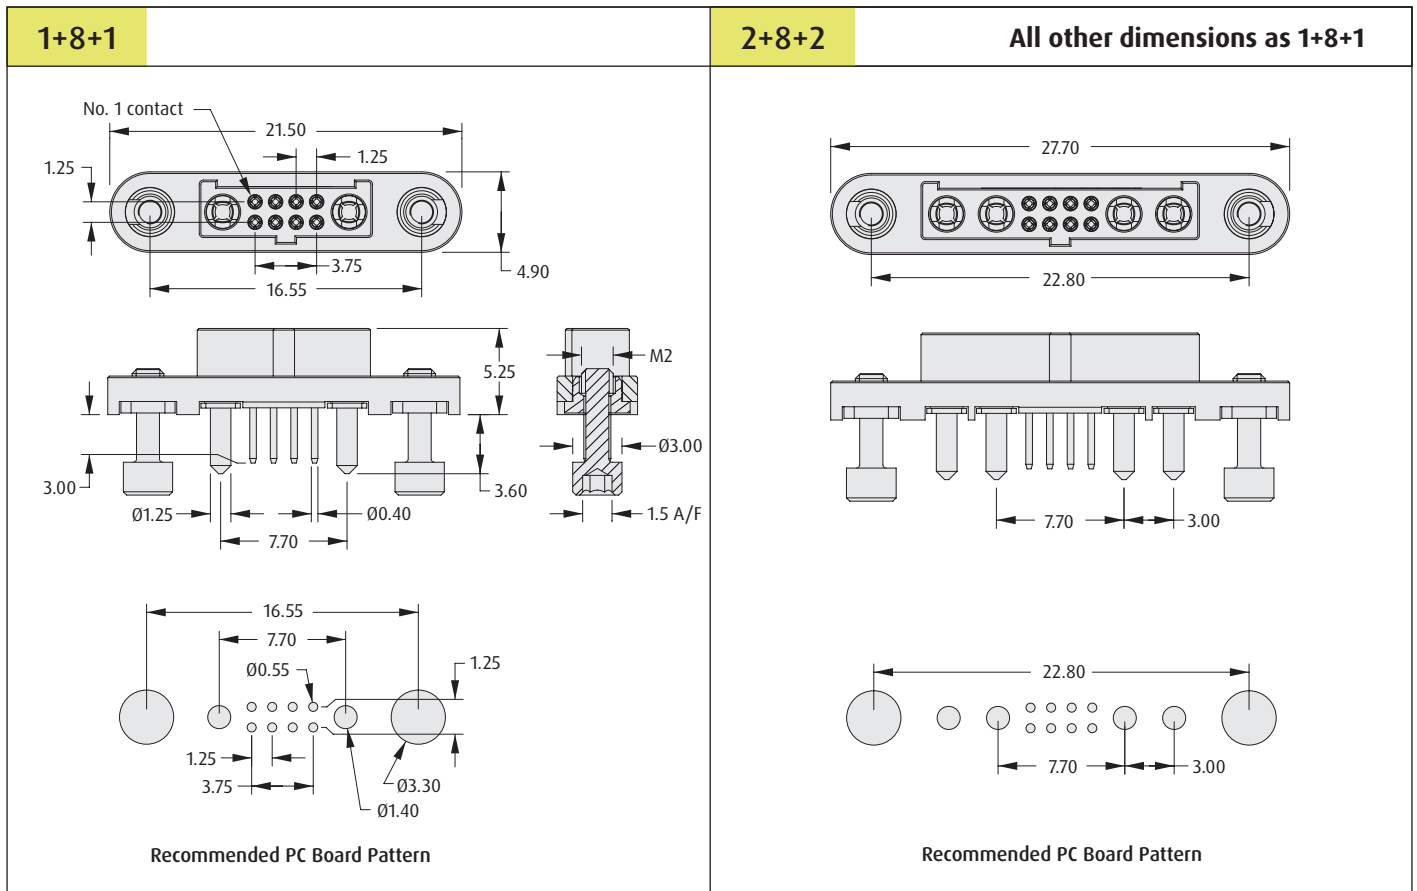


Gecko-MT Connectors

GECKO-MT

Female Vertical Throughboard

- 2A current rating for signal contacts, 10A for power contacts.
- Stainless steel floating screw fixing to mate with internal screw-loks on male connectors.
- 4-finger Beryllium Copper contact design on both signal and power contacts.
- Positive keyway polarization.

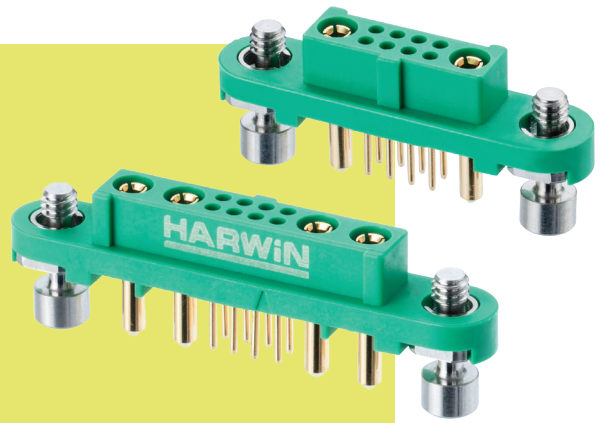

HOW TO ORDER

G125 - FV1 08 05 F1 - XABXAB P

SERIES CODE G125	PACKAGING P Tape & Reel strips				
TOTAL NO. OF SIGNAL CONTACTS 08	POWER CONTACTS <table border="1"> <tr> <td>1AB1AB</td> <td>1+8+1 Configuration</td> </tr> <tr> <td>2AB2AB</td> <td>2+8+2 Configuration</td> </tr> </table>	1AB1AB	1+8+1 Configuration	2AB2AB	2+8+2 Configuration
1AB1AB	1+8+1 Configuration				
2AB2AB	2+8+2 Configuration				
SCREW-LOK F1 Floating Hex Socket					

All dimensions in mm.

Patent Published