


# Datamate Power Connectors

## Male Cable Assemblies


- ❖ Fully assembled connectors, fixings and cable in standard configurations.
- ❖ Standard Power contacts are rated to 20A, and are fitted with 12AWG, white PTFE-insulated cables.
- ❖ High Power are rated to 40A nominal, up to 80A max. Fitted with 10AWG, white PTFE-insulated cables.



### STANDARD POWER

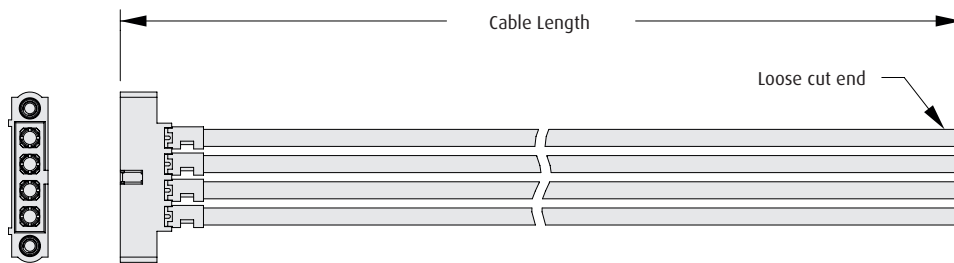

### HIGH POWER

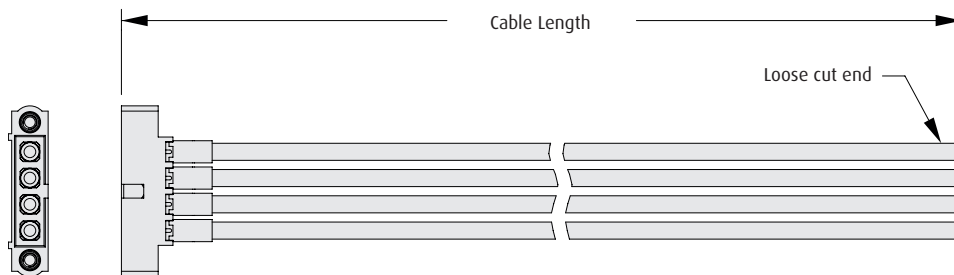

### HOW TO ORDER

**M80 - MC XXX M1 - XX - 0150 L**

<b>SERIES CODE</b>	M80	<b>POWER CONTACTS PART NO.</b>	MC	XXX	<b>JACKSCREW</b>	M1	-	XX	-	0150	<b>TERMINATION - SECOND END</b>	L
		335	Standard Power			M1	Internal Jackscrews					Loose cut end
		PM5	High Power									
											<b>CABLE LENGTH</b>	0150
												150mm
											<b>NO. OF POWER CONTACTS</b>	02, 04, 06, 08

All dimensions in mm.