

Datamate Power Connectors


Female Cable Assemblies

- Ready-made cable assemblies, fully tested and inspected.
- Standard Power contacts are rated to 20A, and are fitted with 12AWG, white PTFE-insulated cables.
- High Power are rated to 40A nominal, up to 80A max. Fitted with 10AWG, white PTFE-insulated cables.
- Cable assemblies are constructed with Contact A to Contact A, Contact B to Contact B, etc.




DATAMATE POWER

STANDARD POWER

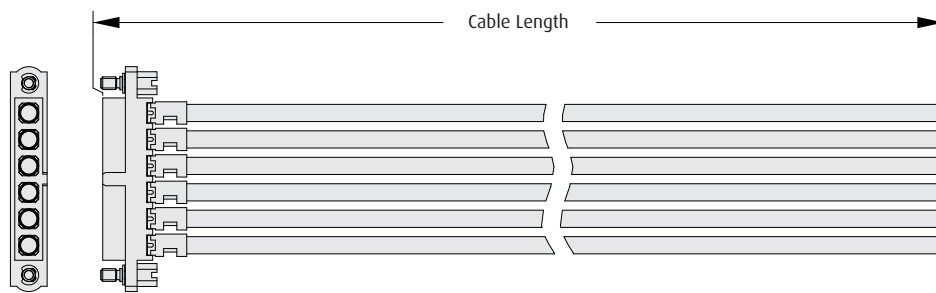

HIGH POWER

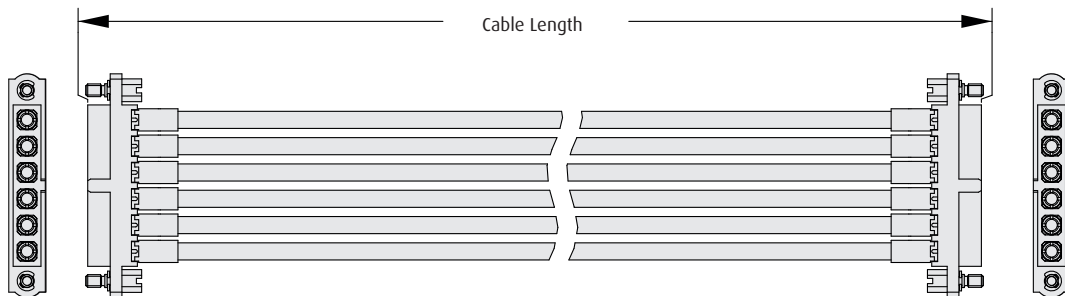

HOW TO ORDER

M80 - FC XXX F1 - XX - XXXX XX

SERIES CODE

POWER CONTACTS PART NO.

325 Standard Power

PF5 High Power

JACKSCREW

F1 Hex Slotted Jackscrews

TERMINATION - SECOND END

L Loose cut end

F1 Female connector

CABLE LENGTH

0150 150mm

XXXX XXXXmm

NO. OF POWER CONTACTS

02, 04, 06, 08

All dimensions in mm.