


Datamate Power Connectors

Male Cable Assemblies


- ❖ Ready-made cable assemblies, fully tested and inspected.
- ❖ Standard Power contacts are rated to 20A, and are fitted with 12AWG, white PTFE-insulated cables.
- ❖ High Power are rated to 40A nominal, up to 80A max. Fitted with 10AWG, white PTFE-insulated cables.
- ❖ Cable assemblies are constructed with Contact A to Contact A, Contact B to Contact B, etc.




MALE SINGLE-ENDED

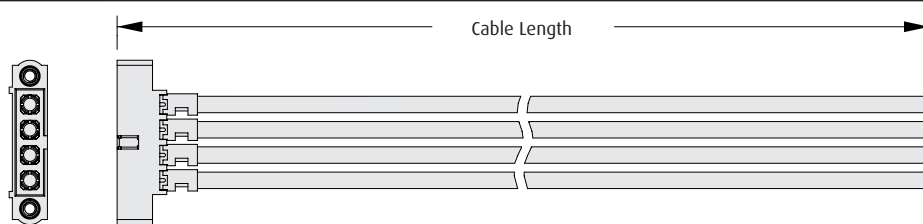

MALE - FEMALE

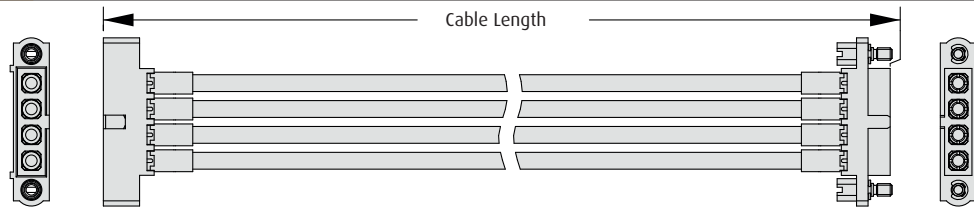

MALE - MALE

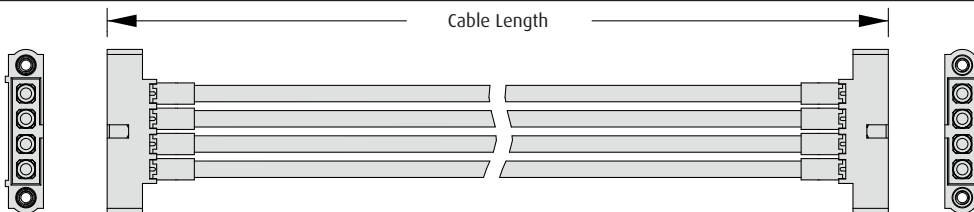

HOW TO ORDER

M80 - MC XXX M1 - XX - XXXX XX

SERIES CODE

POWER CONTACTS PART NO.

335	Standard Power
PM5	High Power

JACKSCREW

M1	Internal Jackscrews
-----------	---------------------

TERMINATION - SECOND END

L	Loose cut end
F1	Female (Floating Hex Slotted Jackscrew)
M1	Male connector

CABLE LENGTH

0150	150mm
XXXX	XXXXmm

NO. OF POWER CONTACTS

02, 04, 06, 08

All dimensions in mm.