

# Customer Information Sheet

DRAWING No.: M22-6023042

SHEET 2 OF 2


IF IN DOUBT - ASK

(C)

NOT TO SCALE


THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm

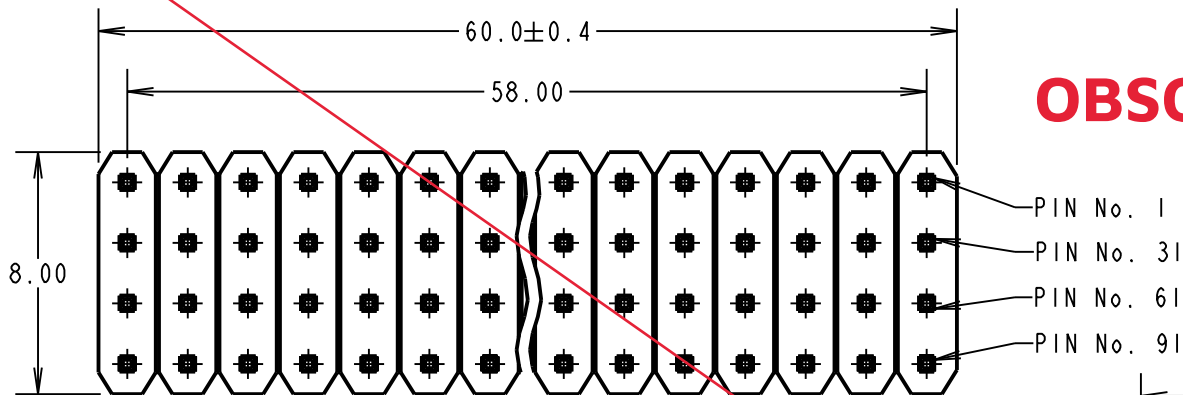


**OBSOLETE**

SPECIFICATION:  
 MATERIALS:  
 MOULDING = NYLON 6T, UL94V-0 BLACK  
 CONTACTS = BRASS  
 FINISH (OVER NICKEL):  
 GOLD ON CONTACT AREA, 100% TIN ON TAILS  
 ELECTRICAL:  
 CONTACT RESISTANCE = 30mΩ MAX.  
 INSULATION RESISTANCE = 5000MΩ MIN.  
 CURRENT RATING = 1A MAX  
 VOLTAGE RATING = 250V AC  
 VOLTAGE PROOF = 800V AC FOR ONE MINUTE  
 ENVIRONMENTAL:  
 TEMPERATURE RANGE = -55° TO +105°C  
 PACKING:  
 TUBE

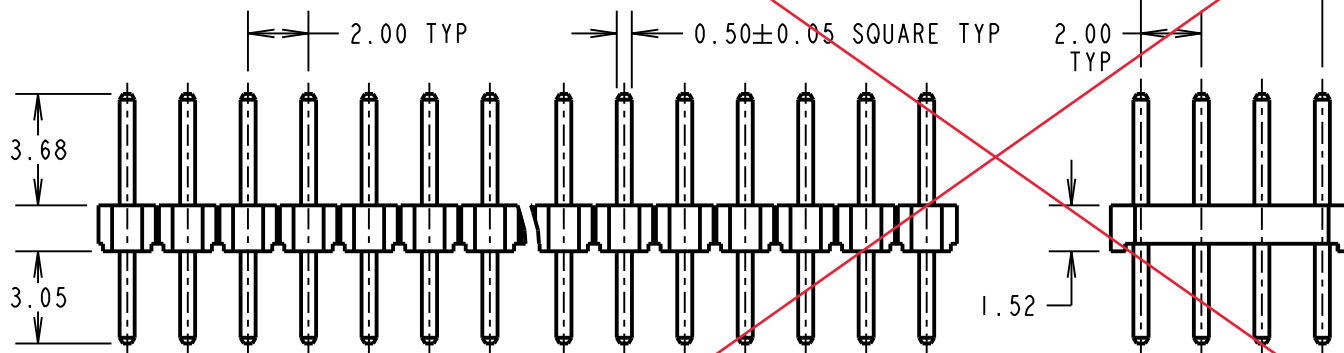

NOTES:  
 1. ALL TOLERANCES ARE ±0.20 UNLESS OTHERWISE STATED.

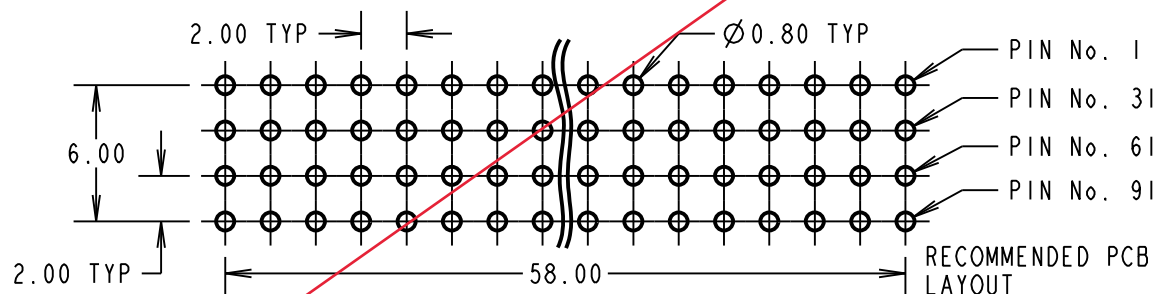

ORDER CODE: **M22-6023042**

No. OF CONTACTS PER ROW: 30

FINISH: 42 = SELECTIVE GOLD + 100% TIN

MSP	8	25.04.17	20391
NAME	ISS.	DATE	C/NOTE
APPROVED:		M.PERREN	
CHECKED:		S.BENNETT	
DRAWN:		D.BECK	
CUSTOMER REF.:			
ASSEMBLY DRG.:			

**HARWIN**

www.harwin.com  
 technical@harwin.com

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES  
 X = ±1mm  
 X.X = ±0.50mm  
 X.XX = ±0.10mm  
 X.XXX = ±0.01mm  
 ANGLES = ±5°  
 UNLESS STATED

MATERIAL: SEE ABOVE

FINISH: SEE ABOVE

S/AREA: mm<sup>2</sup>

TITLE: PC104 PLUS POST HEADER

DRAWING NUMBER: **M22-6023042**

SHT 2 OF 2