


Customer Information Sheet

DRAWING No.: M3497-98 SHEET 2 OF 2 IF IN DOUBT - ASK (C) NOT TO SCALE THIRD ANGLE PROJECTION ALL DIMENSIONS IN mm

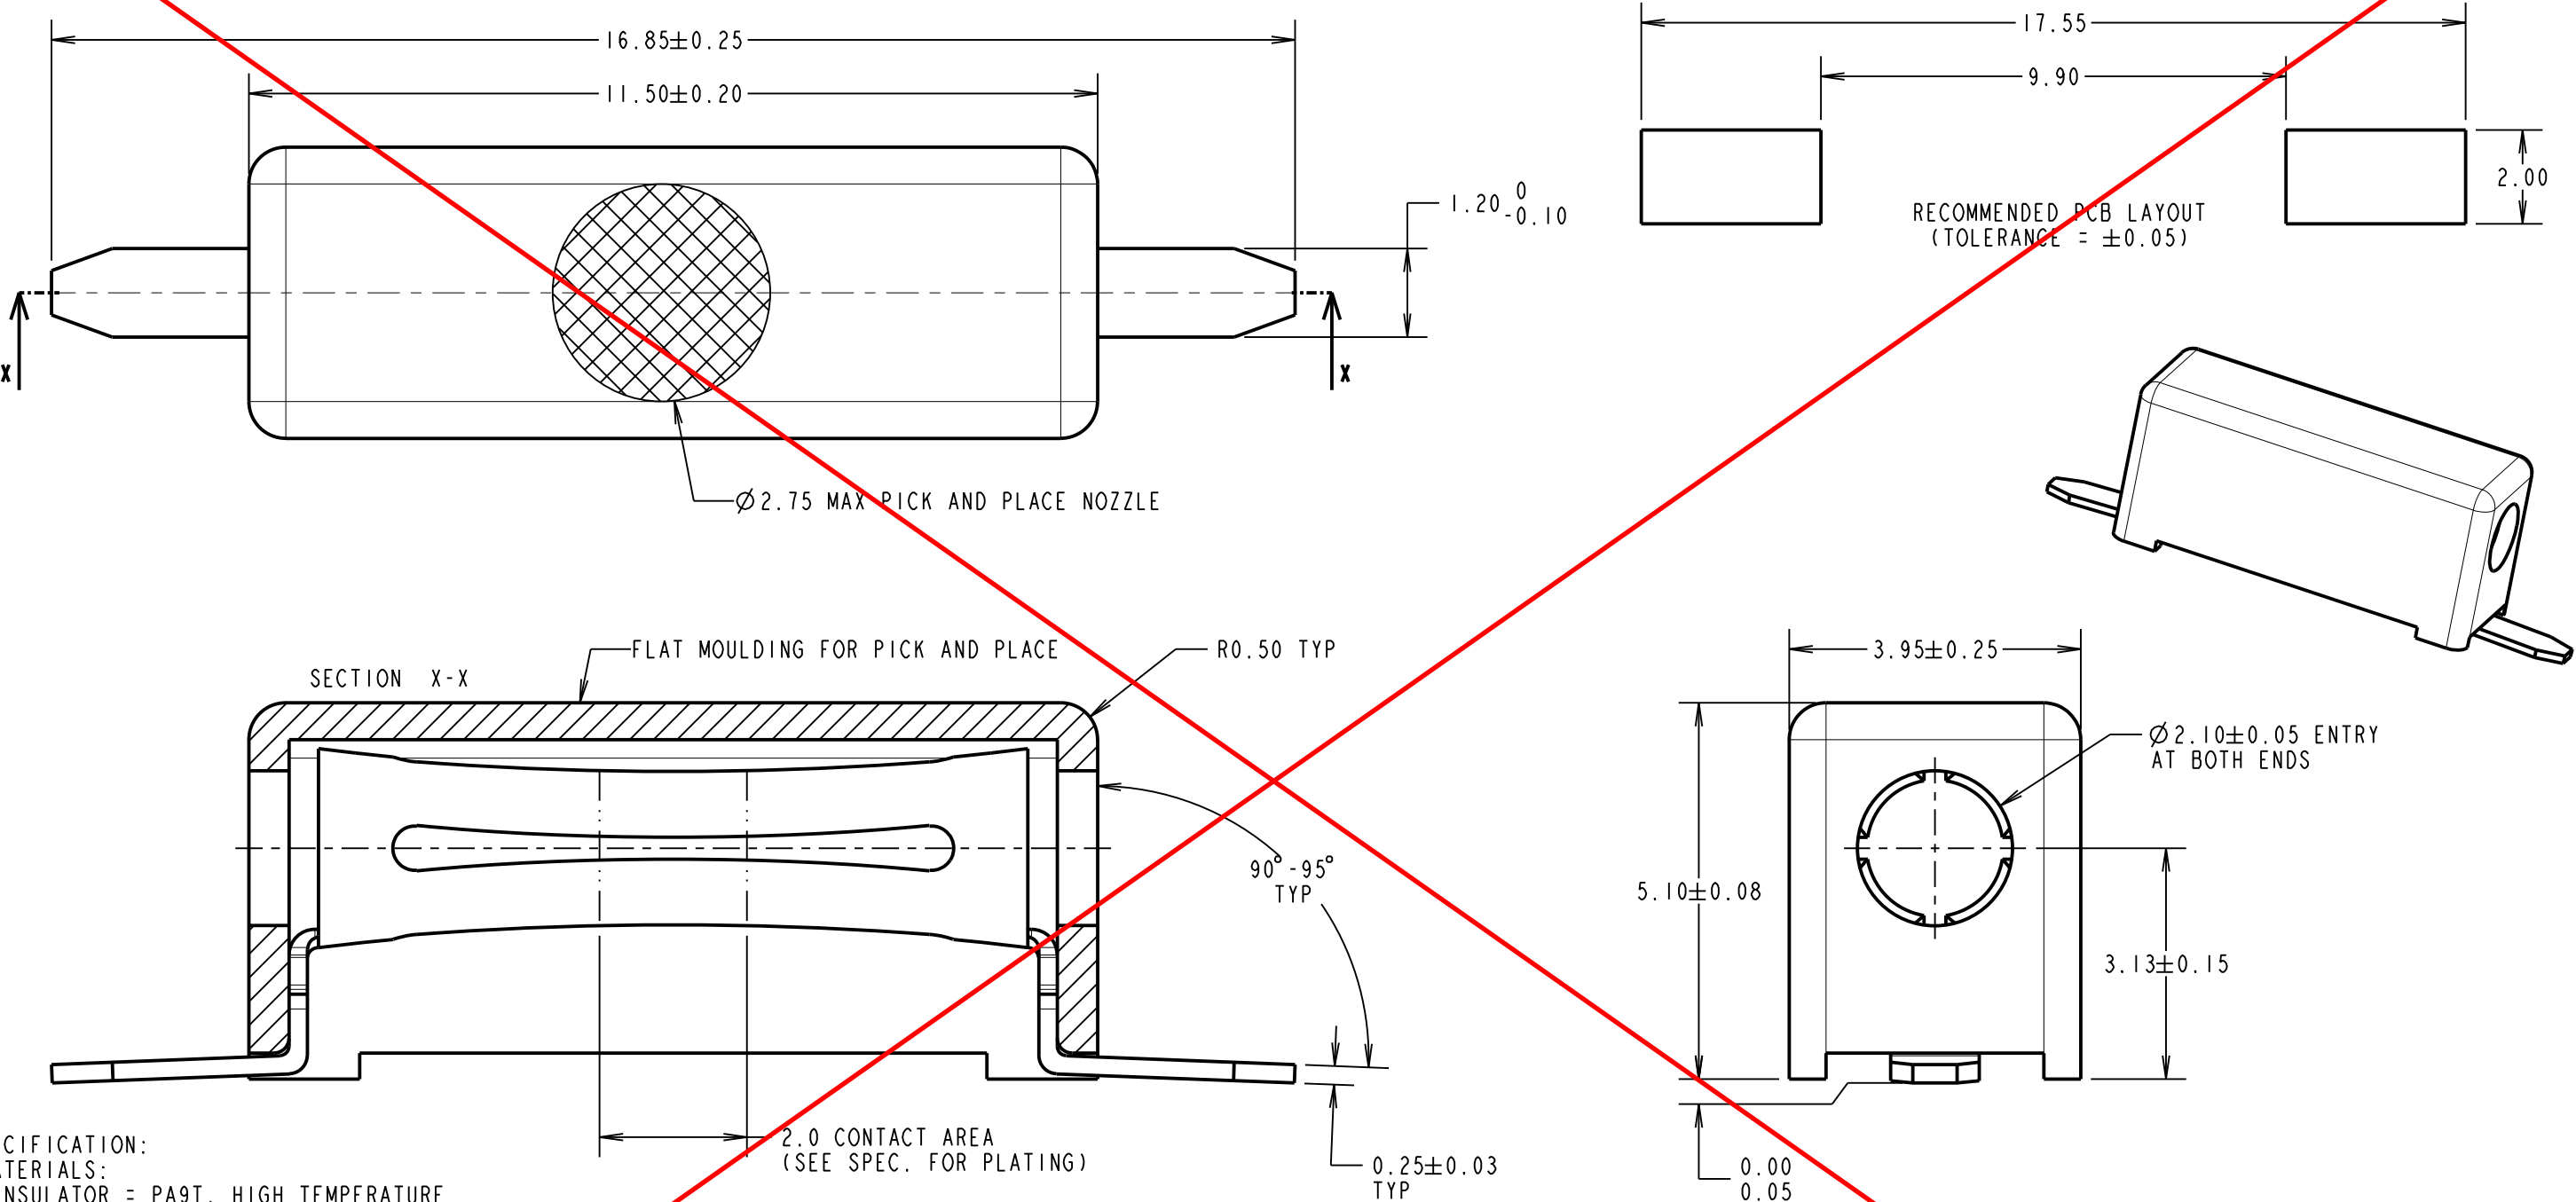

SPECIFICATION:
MATERIALS:
INSULATOR = PA9T, HIGH TEMPERATURE THERMOPLASTIC, UL94V-0, BLACK
CONTACT = PHOSPHOR BRONZE
FINISH:
CONTACT = 1.00μ - 3.05μ NICKEL ALL OVER, 0.254μ GOLD ON CONTACT AREA, GOLD FLASH ON TAILS.
ELECTRICAL:
CURRENT RATING = 5A
VOLTAGE RATING = 1,500V AC/DC
INSULATION RESISTANCE = $1000M\Omega$ MIN
CONTACT RESISTANCE = $5m\Omega$ MAX
MECHANICAL:
INSERTION FORCE = 22.2N MAX ($\phi 2.03$ mm PROBE)
WITHDRAWAL FORCE = 2.2N MIN ($\phi 2.03$ mm PROBE)
DURABILITY = 100 CYCLES
ENVIRONMENTAL:
OPERATING TEMPERATURE = -40°C TO $+105^\circ\text{C}$
PACKAGING:
50 PARTS IN BAG;
TEN PARTS IN CUT STRIP, FIVE STRIPS ARE PACKED IN BAG

OBSOLETE

NOTES:
1. PART TO BE SUPPLIED IN CUT STRIPS OF TAPE USED IN REELED VERSION. FOR REELED VERSION, SEE DRAWING M3497-98R.
2. RECOMMENDED MATING PROBE: $\phi 2.01$ mm MIN TO $\phi 2.05$ mm MAX.

SB	2	10.04.14	12442
NAME	ISS.	DATE	C/NOTE
APPROVED:		S.BENNETT	
CHECKED:		S.FLOWER	
DRAWN:		S.BENNETT	
CUSTOMER REF.:			
ASSEMBLY DRG:			

HARWIN

www.harwin.com
technical@harwin.com

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES
X. = ± 1 mm
X.X = ± 0.25 mm
X.XX = ± 0.10 mm
X.XXX = ± 0.01 mm
ANGLES = $\pm 5^\circ$
UNLESS STATED

MATERIAL: SEE ABOVE
FINISH: SEE ABOVE
S/AREA: mm²

TITLE: SMT TEST JACK IN CUT STRIPS
DRAWING NUMBER: M3497-98
SHT 2 OF 2