

Customer Information Sheet

DRAWING No.: M50-320XX45

SHEET 2 OF 2


IF IN DOUBT - ASK

©

NOT TO SCALE

THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm

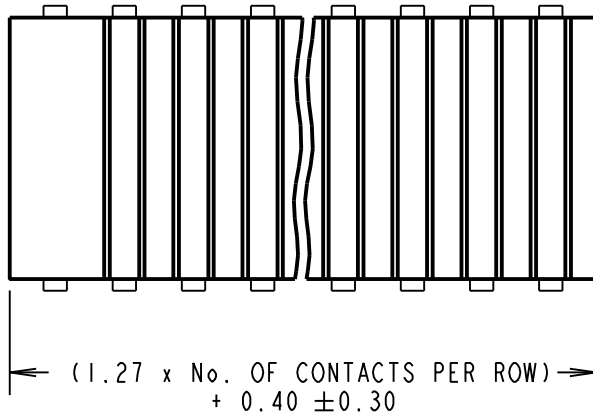

ORDER CODE:


M50-320XX45

No. OF CONTACTS PER ROW: _____

03 to 15, 20, 25

FINISH: _____

45 = 0.25µ GOLD ALL OVER

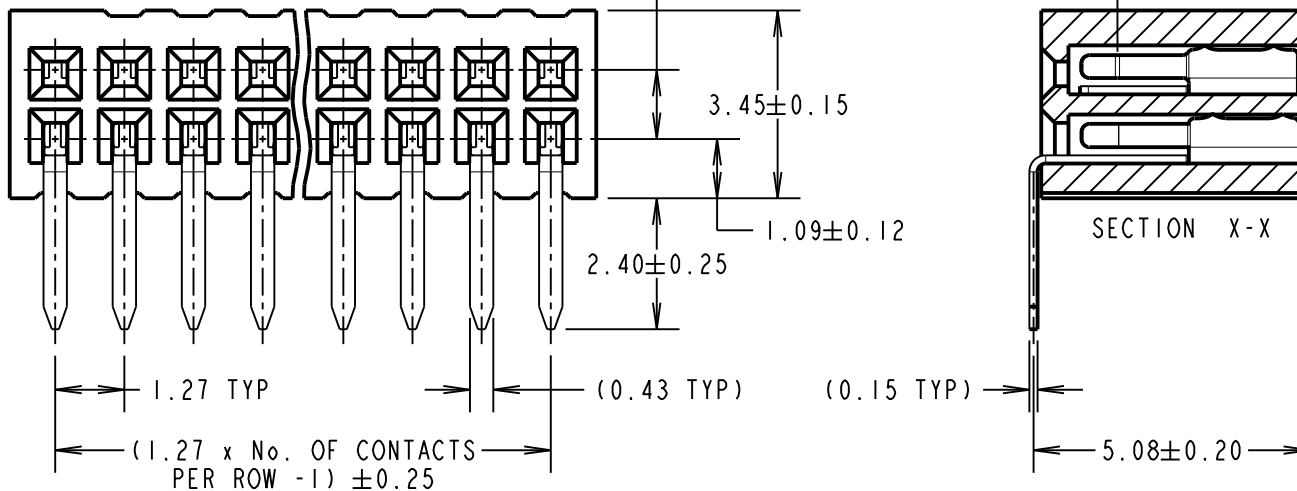

SPECIFICATIONS:

MATERIAL:

MOULDING = NYLON 9T UL94V-0, BLACK

CONTACT = PHOSPHOR BRONZE

FINISH:

CONTACT = 0.25µ GOLD ALL OVER

ELECTRICAL:

CURRENT RATING = 1A

DIELECTRIC VOLTAGE = 500V AC FOR ONE MINUTE

CONTACT RESISTANCE = 20mΩ MAX

INSULATION RESISTANCE = 1000MΩ MIN

MECHANICAL:

INSERTION FORCE = 0.98N MAX PER PIN

WITHDRAWAL FORCE = 0.12N MIN PER PIN

DURABILITY = 300 CYCLES MIN

ENVIRONMENTAL:

OPERATING TEMPERATURE = -40°C TO +105°C

PACKING:

TUBE

FOR COMPLETE SPECIFICATION, SEE COMPONENT SPECIFICATION C029XX (LATEST ISSUE)

NOTES:

1. RECOMMENDED PCB HOLE SIZE = $\varnothing 0.70 \pm 0.05$ mm.

OBSOLETE
No. of contacts per row = 02, 16 to 19, 21 to 24, 26 to 50
Last Time Buy = 15th June 2018

SB	9	18.03.13	11904
NAME	ISS.	DATE	C/NOTE
APPROVED:		S.BENNETT	
CHECKED:		S.FLOWER	
DRAWN:		J. ENRIGHT	
CUSTOMER REF.:			
ASSEMBLY DRG:			

HARWIN

www.harwin.com
 technical@harwin.com

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES

X. = ±1mm
 X.X = ±0.25mm
 X.XX = ±0.10mm
 X.XXX = ±0.01mm
 ANGLES = ±5°
 UNLESS STATED

MATERIAL:

SEE ABOVE

FINISH:

SEE ABOVE

S/AREA:

mm²

TITLE:

1.27mm PITCH DIL SIDE ENTRY SOCKET ASSY

DRAWING NUMBER:

M50-320XX45

SHT
 2 OF 2