






OBSOLETE

SPECIFICATIONS:

MATERIAL:-
 BASE: PA9T/LCP, BLACK/NATURAL COLOR
 COVER: SUS, T=0.15mm
 CONTACT TERMINAL: C5210-H, T=0.15mm
 GUIDE TERMINAL: C5210-H, T=0.15mm
 FINISH:-
 COVER: FINISH LAYER SELECTED Sn
 CONTACT TERMINAL: SELECTED AU Sn-Cu
 GUIDE TERMINAL: FINISHED LAYER Sn
 ELECTRICAL:-
 CONTACT RESISTANCE: 40 mΩ MAX.
 INSULATION RESISTANCE: 100 MΩ MIN.

*LEAD CO-PLANARITY: MAX 0.10mm

NOTES: ALL DIMENSIONS AND NOTES MARKED **X** ARE CRITICAL AND MUST BE CHECKED IN ACCORDANCE WITH QUALITY DOC. Q1-02A

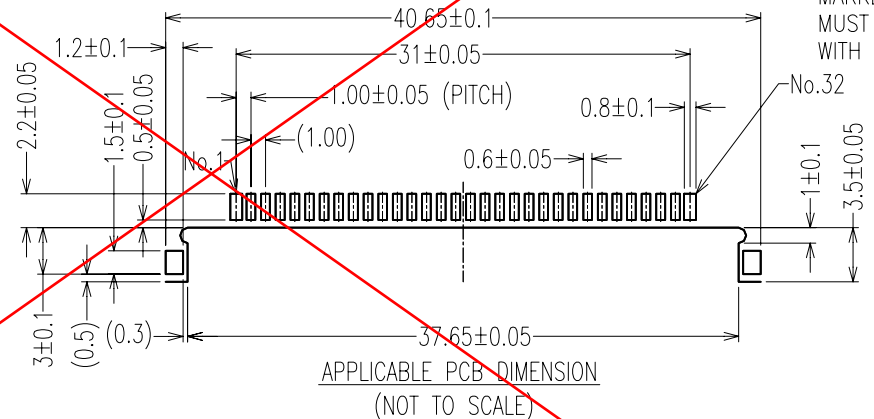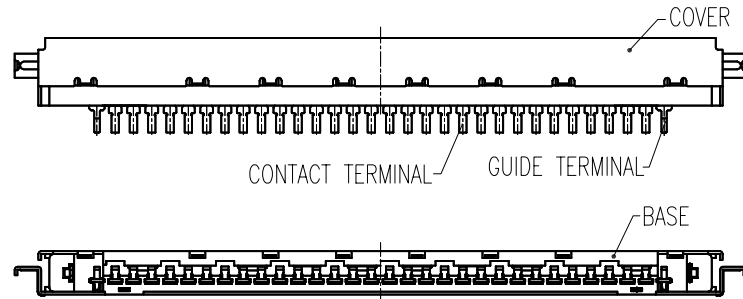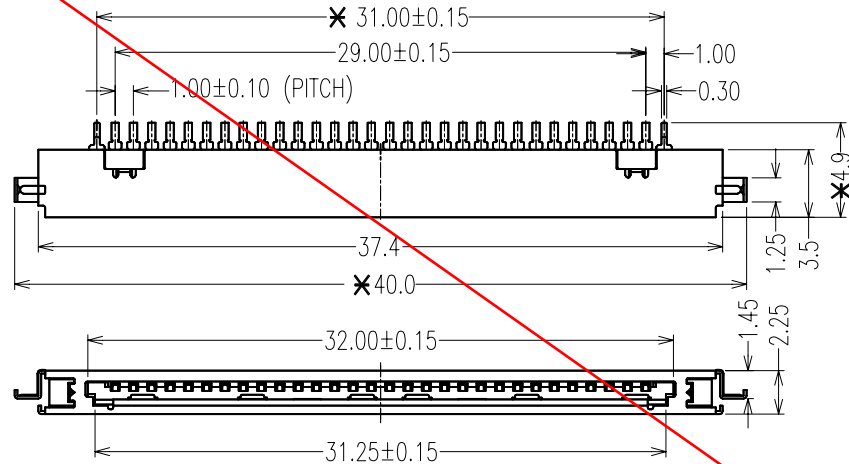

APPLICABLE PCB DIMENSION (NOT TO SCALE)

Allan	1	01.08.06	-
NAME	ISS.	DATE	C/NOTE
APPROVED: <i>[Signature]</i>			
CHECKED: <i>[Signature]</i>			
DRAWN: Allan			
CUSTOMER REF.:			
ASSEMBLY DRG:			

TOLERANCES

X. = ±0.30mm
 X.X = ±0.25mm
 X.XX = ±0.20mm

HARWIN

HARWIN USA TEL: 603 893 5376 FAX: 603 893 5396 mis@harwin.com	HARWIN Europe (UK) TEL: 023 9231 4545 FAX: 023 9231 4590 mis@harwin.co.uk	HARWIN Asia TEL: +65 6 779 4909 FAX: +65 6 779 3868 mis@harwin.com.sg
--	--	--

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES

X. = ±1mm
 X.X = ±0.25mm
 X.XX = ±0.10mm
 X.XXX = ±0.01mm

ANGLES = ±5°
 UNLESS STATED

MATERIAL: SEE NOTES

FINISH: SEE NOTES

S/AREA: mm²

TITLE: LVDS POWER UP 30 PIN RECEPTACLE (OFFSET TYPE)

DRAWING NUMBER: M711-2113042R

SHT 1 OF 1