## Customer Information

IF IN DOUBT - ASK NOT TO SCALE DRAWING No.: M80-5L2XXXXMD SHT 2 OF 2 THIRD ANGLE PROJECTION ALL DIMENSIONS IN mm



MATERIAL:

MOULDING = GLASS-FILLED PPS,

UL94V-O, BLACK CONTACT = PHOSPHOR BRONZE

IOILOK RETAINER AND SCREW = STAINLESS STEEL

FINISH (CONTACTS):

05 = 0.75 µ GOLD ALL OVER

22 = 0.75 µ GOLD ON CONTACT AREA,

3µ TIN/LEAD ON TAILS

42 = 0.75 µ GOLD ON CONTACT AREA. 3μ 100% TIN OVER NICKEL ON TAILS

FIFCTRICAL:

CURRENT RATING AT 25°C = 3.0A MAX CURRENT RATING AT 85°C = 2.2A MAX

WORKING VOLTAGE = 800V AC/DC

VOLTAGE PROOF = 1200V AC/DC CONTACT RESISTANCE = 25 m $\Omega$  MAX

INSULATION RESISTANCE = 100  $M\Omega$  MIN

MECHANICAL:


DURABILITY = 500 OPERATIONS


ENVIRONMENTAL:


TEMPERATURE RANGE = -55°C TO +125°C


PACKING:


FOR COMPLETE SPECIFICATION, SEE COMPONENT SPECIFICATION COO5XX (LATEST ISSUE)

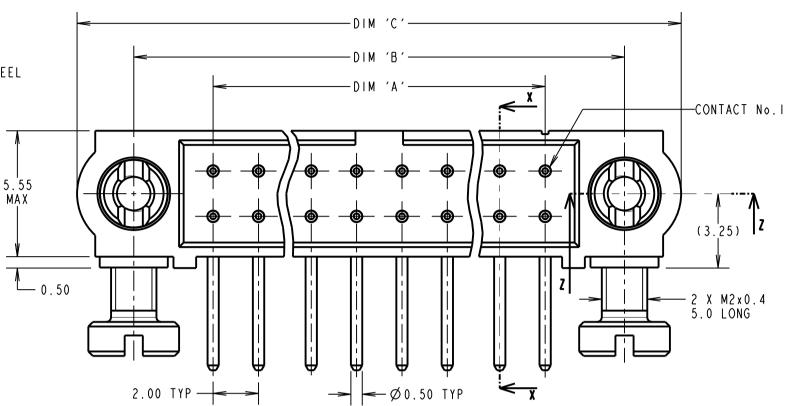

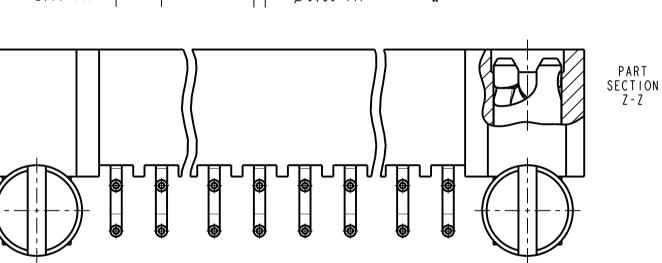

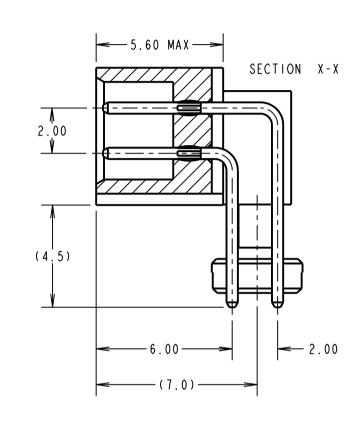

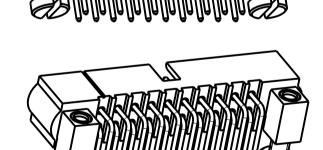

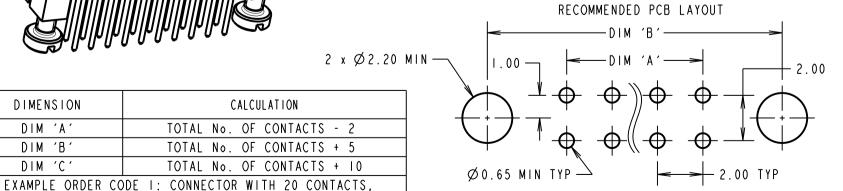

ORDER CODE: M80-5L2XXXMD TOTAL No. OF CONTACTS

04 TO 50 (EVEN NUMBERS ONLY)

FINISH

05 - ALL OVER GOLD

22 - GOLD ON CONTACT AREA / TIN/LEAD ON TAIL

42 - GOLD ON CONTACT AREA / 100% TIN OVER NICKEL ON TAIL

	MGP	1	18.02.13	11932	
	NAME	ISS.	DATE	C/NOTE	
	APPRO	APPROVED: MGP			
	CHECKED: SB DRAWN: M.G.PLESTED CUSTOMER REF.:				
	ASSEN	MBLY (	ORG:		

## GOLD ON CONTACT AREA AND 100% TIN OVER NICKEL ON TAIL M80-5L22042MD

DIMENSION

DIM 'A'

DIM 'B'

DIM 'C'

DIM 'A' = 18.00mm, DIM 'B' = 25.00mm, DIM 'C' = 30mm.

CALCULATION



technical@harwin.com

THIS DRAWING AND ANY
INFORMATION OR DESCRIPTIVE
MATTER SET OUT HEREON ARE
CONFIDENTIAL AND COPYRIGHT
PROPERTY OF THE HARWIN
GROUP AND MUST NOT BE
DISCLOSED, LOANED, COPIED
OR USED FOR MANUFACTURING,
TENDERING OR FOR ANY
OTHER PURPOSE WITHOUT

X. = ±1mm  $X.X = \pm 0.25 mr$  $X.XX = \pm 0.10$ mm  $X.XXX = \pm 0.01$ mm

TOLERANCES

FINISH: S/AREA:

MATERIAL: SEE ABOVE

SEE ABOVE

DATAMATE J-TEK DIL HORIZ 4.5mm PC-TAIL MALE ASSY WITH IOILOK BOARD MOUNT RETAINERS

DRAWING NUMBER:

M80-5L2XXXMD