


# Datamate J-Tek Connectors

## Female Crimp Housing - Guide Pin, 101Lok

- Compatible with all female signal barrel crimp contacts, including T-Contact shown on previous page.
- Guide pin style includes board mount fixing.
- 101Lok fixing gives secure, fast and simple mating; no special tooling required. Just a simple 101-degree turn is required to fix the connectors together.
- Connectors mate with Datamate J-Tek male connectors with applicable jackscrews or 101Lok fixings.

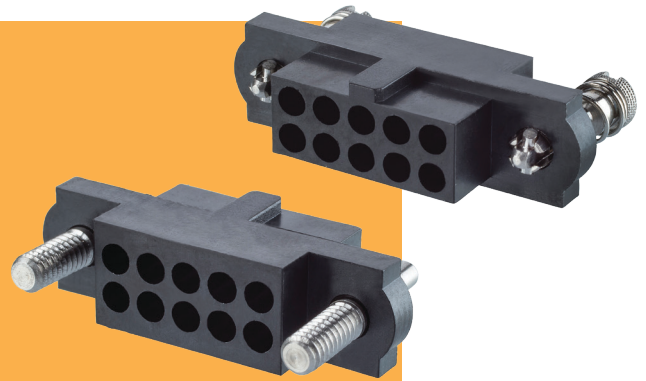

GUIDE PIN JACKSCREWS	101LOK									
<b>CALCULATION</b>										
<b>A</b>	B + 12									
<b>B</b>	Total no. of contacts - 2									
<b>C</b>	B + 7									
<b>HOW TO ORDER</b>										
<b>M80 - 41 X XX 98</b>										
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr style="background-color: #f4a460; color: white;"> <th colspan="2">SERIES CODE</th> </tr> <tr> <td style="width: 20px; text-align: center;">7</td> <td>Guide Pin Jackscrews</td> </tr> <tr> <td style="width: 20px; text-align: center;">8</td> <td>101Lok</td> </tr> </table>	SERIES CODE		7	Guide Pin Jackscrews	8	101Lok	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr style="background-color: #f4a460; color: white;"> <th>TOTAL NO. OF CONTACTS</th> </tr> <tr> <td style="text-align: center;">04 to 50 (Even numbers only)</td> </tr> </table>	TOTAL NO. OF CONTACTS	04 to 50 (Even numbers only)	
SERIES CODE										
7	Guide Pin Jackscrews									
8	101Lok									
TOTAL NO. OF CONTACTS										
04 to 50 (Even numbers only)										
<b>ORDER CODE</b>										
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr style="background-color: #f4a460; color: white;"> <th colspan="2">JACKSCREW TYPE</th> </tr> <tr> <td style="width: 20px; text-align: center;">7</td> <td>Guide Pin Jackscrews</td> </tr> <tr> <td style="width: 20px; text-align: center;">8</td> <td>101Lok</td> </tr> </table>	JACKSCREW TYPE		7	Guide Pin Jackscrews	8	101Lok				
JACKSCREW TYPE										
7	Guide Pin Jackscrews									
8	101Lok									
<b>ORDER CODE</b>										
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr style="background-color: #f4a460; color: white;"> <th colspan="2">HARDWARE FOR GUIDE PIN STUD</th> </tr> <tr> <td style="width: 50%; padding: 5px;"> <p><b>Slotted Board Mount Nut</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr style="background-color: #f4a460; color: white;"> <th>ORDER CODE</th> </tr> <tr> <td style="text-align: center;">M80-2130000B</td> </tr> </table> </td> <td style="width: 50%; padding: 5px;"> <p><b>Hexagonal Board Mount Nut</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr style="background-color: #f4a460; color: white;"> <th>ORDER CODE</th> </tr> <tr> <td style="text-align: center;">M80-2430000B</td> </tr> </table> </td> </tr> </table>		HARDWARE FOR GUIDE PIN STUD		<p><b>Slotted Board Mount Nut</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr style="background-color: #f4a460; color: white;"> <th>ORDER CODE</th> </tr> <tr> <td style="text-align: center;">M80-2130000B</td> </tr> </table>	ORDER CODE	M80-2130000B	<p><b>Hexagonal Board Mount Nut</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr style="background-color: #f4a460; color: white;"> <th>ORDER CODE</th> </tr> <tr> <td style="text-align: center;">M80-2430000B</td> </tr> </table>	ORDER CODE	M80-2430000B	<p>Order separately from connector</p>
HARDWARE FOR GUIDE PIN STUD										
<p><b>Slotted Board Mount Nut</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr style="background-color: #f4a460; color: white;"> <th>ORDER CODE</th> </tr> <tr> <td style="text-align: center;">M80-2130000B</td> </tr> </table>	ORDER CODE	M80-2130000B	<p><b>Hexagonal Board Mount Nut</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr style="background-color: #f4a460; color: white;"> <th>ORDER CODE</th> </tr> <tr> <td style="text-align: center;">M80-2430000B</td> </tr> </table>	ORDER CODE	M80-2430000B					
ORDER CODE										
M80-2130000B										
ORDER CODE										
M80-2430000B										

All dimensions in mm.