


Datamate J-Tek Connectors

Male Crimp Kit Extended Wall

- Extended Wall Datamate allows back potting to be performed.
- Fully shrouded contacts.
- Large Bore 22 AWG, Small Bore 24 – 28 AWG.
- Part numbers are for a complete kit of a housing and the applicable number of contacts.
- Crimp contacts are rear insertable and replaceable.
- Crimp contacts supplied loose.

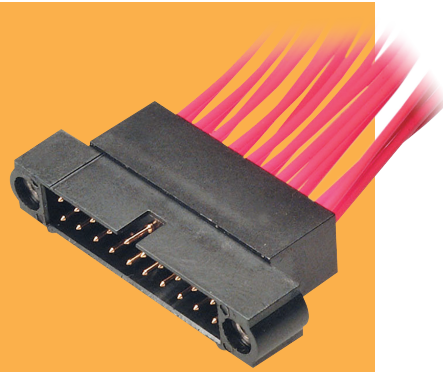

WITHOUT JACKSCREWS	WITH JACKSCREWS																						
<div style="margin-top: 10px; background-color: #f4a460; color: white; padding: 5px; font-weight: bold;">CALCULATION</div> <table border="1" style="margin-top: 5px; border-collapse: collapse;"> <tr> <td style="width: 20px;">A</td> <td>B + 12</td> </tr> <tr> <td>B</td> <td>Total no. of contacts - 2</td> </tr> <tr> <td>C</td> <td>B + 7</td> </tr> </table>	A	B + 12	B	Total no. of contacts - 2	C	B + 7																	
A	B + 12																						
B	Total no. of contacts - 2																						
C	B + 7																						
TOOLS	WIRE STRIPPING DETAILS																						
<p>Recommended Crimp Tool - M22520/2-01</p> <p>Positioner - Z80-193</p> <p>Contact Insertion/Removal Tool - Z80-280</p> <ul style="list-style-type: none"> Spare contacts shown on following pages. Instruction sheets available at www.harwin.com/instructions. 																							
HOW TO ORDER																							
M80 - 5XX XX 05 X																							
<div style="background-color: #f4a460; color: white; padding: 5px; margin-bottom: 10px;">SERIES CODE</div> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr style="background-color: #f4a460; color: white;"> <th colspan="2">TYPE</th> </tr> </thead> <tbody> <tr> <td style="width: 30px;">575</td> <td>Large Bore (22 AWG), without Jackscrews</td> </tr> <tr> <td>576</td> <td>Small Bore (24-28 AWG), without Jackscrews</td> </tr> <tr> <td>565</td> <td>Large Bore (22 AWG), with Jackscrews</td> </tr> <tr> <td>566</td> <td>Small Bore (24-28 AWG), with Jackscrews</td> </tr> </tbody> </table>	TYPE		575	Large Bore (22 AWG), without Jackscrews	576	Small Bore (24-28 AWG), without Jackscrews	565	Large Bore (22 AWG), with Jackscrews	566	Small Bore (24-28 AWG), with Jackscrews	<div style="margin-top: 10px;"> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr style="background-color: #f4a460; color: white;"> <th colspan="2">WALL SIZE</th> </tr> </thead> <tbody> <tr> <td style="width: 30px;">BLANK</td> <td>Wall = 5mm</td> </tr> <tr> <td>A</td> <td>Wall = 1mm</td> </tr> </tbody> </table> </div> <div style="margin-top: 10px;"> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr style="background-color: #f4a460; color: white;"> <th colspan="2">FINISH</th> </tr> </thead> <tbody> <tr> <td style="width: 30px;">05</td> <td>Gold</td> </tr> </tbody> </table> </div> <div style="margin-top: 10px;"> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr style="background-color: #f4a460; color: white;"> <th>TOTAL NO. OF CONTACTS</th> </tr> </thead> <tbody> <tr> <td>06, 10, 14, 20, 26, 34</td> </tr> </tbody> </table> </div>	WALL SIZE		BLANK	Wall = 5mm	A	Wall = 1mm	FINISH		05	Gold	TOTAL NO. OF CONTACTS	06, 10, 14, 20, 26, 34
TYPE																							
575	Large Bore (22 AWG), without Jackscrews																						
576	Small Bore (24-28 AWG), without Jackscrews																						
565	Large Bore (22 AWG), with Jackscrews																						
566	Small Bore (24-28 AWG), with Jackscrews																						
WALL SIZE																							
BLANK	Wall = 5mm																						
A	Wall = 1mm																						
FINISH																							
05	Gold																						
TOTAL NO. OF CONTACTS																							
06, 10, 14, 20, 26, 34																							

All dimensions in mm.