


Datamate J-Tek Connectors

DATAMATE J-TEK

Male Crimp Kit

- Part numbers are for a complete kit of a housing and the applicable number of contacts.
- Jackscrews are assembled where specified.
- Crimp contacts supplied loose.
- Crimp contacts are rear insertable and replaceable.
- Spare contacts are available.

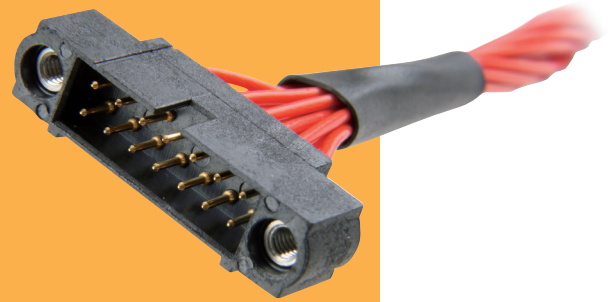

WITHOUT JACKSCREWS	WITH JACKSCREWS																				
<table border="1" style="width: 100%;"> <thead> <tr> <th colspan="2" style="background-color: #f4a460;">CALCULATION</th> </tr> </thead> <tbody> <tr> <td style="background-color: #f4a460;">A</td> <td>B + 12</td> </tr> <tr> <td style="background-color: #f4a460;">B</td> <td>Total no. of contacts - 2</td> </tr> <tr> <td style="background-color: #f4a460;">C</td> <td>B + 7</td> </tr> </tbody> </table>		CALCULATION		A	B + 12	B	Total no. of contacts - 2	C	B + 7												
CALCULATION																					
A	B + 12																				
B	Total no. of contacts - 2																				
C	B + 7																				
TOOLS	WIRE STRIPPING DETAILS																				
<p>Recommended Crimp Tool - M22520/2-01</p> <p>Positioner - Z80-193</p> <p>Contact Insertion/Removal Tool - Z80-280</p> <ul style="list-style-type: none"> Spare contacts shown on following pages. Instruction sheets available at www.harwin.com/instructions. 																					
HOW TO ORDER																					
<p>M80 - 5XX XX 05</p>																					
<table border="1" style="width: 100%;"> <thead> <tr> <th colspan="2" style="background-color: #f4a460;">SERIES CODE</th> </tr> </thead> <tbody> <tr> <th style="background-color: #f4a460;">TYPE</th> <td></td> </tr> <tr> <td style="background-color: #f4a460;">570</td> <td>Large Bore (22 AWG), without Jackscrews</td> </tr> <tr> <td style="background-color: #f4a460;">571</td> <td>Small Bore (24-28 AWG), without Jackscrews</td> </tr> <tr> <td style="background-color: #f4a460;">560</td> <td>Large Bore (22 AWG), with Jackscrews</td> </tr> <tr> <td style="background-color: #f4a460;">561</td> <td>Small Bore (24-28 AWG), with Jackscrews</td> </tr> </tbody> </table>	SERIES CODE		TYPE		570	Large Bore (22 AWG), without Jackscrews	571	Small Bore (24-28 AWG), without Jackscrews	560	Large Bore (22 AWG), with Jackscrews	561	Small Bore (24-28 AWG), with Jackscrews	<table border="1" style="width: 100%;"> <thead> <tr> <th colspan="2" style="background-color: #f4a460;">FINISH</th> </tr> </thead> <tbody> <tr> <td style="background-color: #f4a460;">05</td> <td>Gold</td> </tr> </tbody> </table> <table border="1" style="width: 100%;"> <thead> <tr> <th colspan="2" style="background-color: #f4a460;">TOTAL NO. OF CONTACTS</th> </tr> </thead> <tbody> <tr> <td colspan="2" style="background-color: #f4a460;">04, 06, 08, 10, 12, 14, 20, 26, 34, 42, 50</td> </tr> </tbody> </table>	FINISH		05	Gold	TOTAL NO. OF CONTACTS		04, 06, 08, 10, 12, 14, 20, 26, 34, 42, 50	
SERIES CODE																					
TYPE																					
570	Large Bore (22 AWG), without Jackscrews																				
571	Small Bore (24-28 AWG), without Jackscrews																				
560	Large Bore (22 AWG), with Jackscrews																				
561	Small Bore (24-28 AWG), with Jackscrews																				
FINISH																					
05	Gold																				
TOTAL NO. OF CONTACTS																					
04, 06, 08, 10, 12, 14, 20, 26, 34, 42, 50																					

All dimensions in mm.