






# SMT Hardware

## Cable Management & Grounding Clips

- ❖ Suitable for use with insulated cables with outer diameters  $\varnothing 0.9$  to  $\varnothing 3$ mm and grounding braided coax cables.
- ❖ Cable clip can be soldered at same time as rest of board, reducing additional operation time required for mounting plastic clip types.
- ❖ Low profile & small footprint saves PCB space.

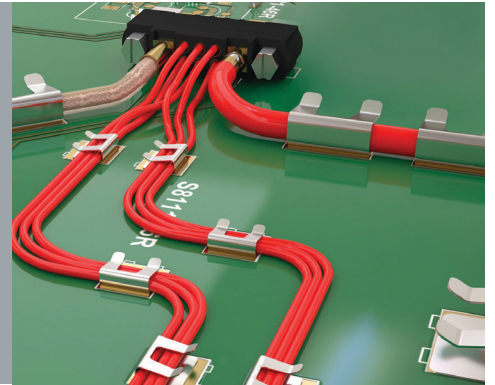

SMT HARDWARE



Recommended PCB Board Pattern

### ❖ Materials

Material: Copper Alloy  
Finish: Tin

### ❖ Packaging

Format: Tape & Reel  
Reel quantity:  $\varnothing 330$ mm reel, see table

## HOW TO ORDER

PART NO.	A	B	C	D	COAX GROUNDING	CABLE RETENTION	REEL QUANTITY
<b>S8091-46R</b>	5.00	4.00	1.35	0.70	$\varnothing 1.12$ mm	2 x $\varnothing 0.9$ mm	3,000
<b>S8101-46R</b>	5.00	4.00	1.50	0.80	RG178, RG179, RG316	2 x $\varnothing 1.0$ mm	3,000
<b>S8111-46R</b>	5.00	5.00	2.05	0.80	RG174, RG179, RG316	3 x $\varnothing 1.0$ mm, 2 x $\varnothing 1.5$ mm	1,500
<b>S8121-46R</b>	7.00	5.50	2.55	1.30	n/a	2 x $\varnothing 1.5$ mm, 1 x $\varnothing 2.0$ mm	1,300
<b>S8131-46R</b>	10.00	8.00	3.55	1.80	RG58	3 x $\varnothing 2.0$ mm, 1 x $\varnothing 3.0$ mm	800

All dimensions in mm.