


SECTION A-A

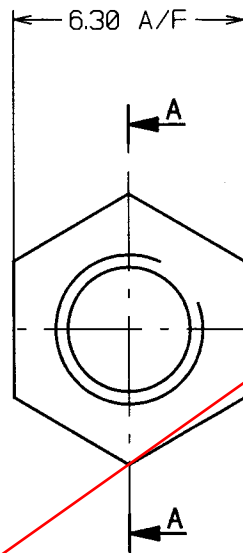

OBSOLETE

ORDER CODE:
R40-101XXXX

LENGTH IN mm
PLATING FINISH:
00 = SELF COLOUR
02 = NICKEL (F0203)
17 = PROTECTIVE DIP (F0701)

PART No.	L	S/AREA	PART No.	L	S/AREA
R40-10105XX	5.00	237.1	R40-10120XX	20.00	804.6
R40-10106XX	6.00	275.0	R40-10125XX	25.00	993.7
R40-10107XX	7.00	312.8			
R40-10108XX	8.00	350.6			
R40-10109XX	9.00	388.4			
R40-10110XX	10.00	426.3			
R40-10111XX	11.00	464.1			
R40-10112XX	12.00	501.9			
R40-10113XX	13.00	539.8			
R40-10114XX	14.00	577.6			
R40-10115XX	15.00	615.4			
R40-10116XX	16.00	653.3			
R40-10118XX	18.00	728.9			

NOTES:

1. 0.3 CHAMFERS FOR LEAD-IN ON THREAD.
2. REMOVE ALL BURRS.
3. THREAD TO BE MANUFACTURED IN ACCORDANCE WITH BS3643 PT.2 1981.

1	12.10.95	----
ISS.	DATE	C/N
APPROVED: <i>[Signature]</i>		
CHECKED: <i>[Signature]</i>		
DRAWN: W. BOURNE		
CUSTOMER REF.		
ASSEMBLY DRG.		

HARWIN

HARWIN INC
U.S.A.

TEL: (812) 285 0055
FAX: (812) 285 0056

HARWIN PLC
UK.

TEL: (01705) 370451
FAX: (01705) 324010

HARWIN PTE
SINGAPORE

TEL: 7794909
FAX: 7793868

TOLERANCES

- X. = ±1mm
- XX = ±0.25mm
- XXX = ±0.10mm
- X.XXX = ±0.01mm
- ANGLES = ±1°
- UNLESS STATED

MATERIAL:

BRASS CZ121 TO BS2874

FINISH: SEE ABOVE

S/AREA: SEE TABLE mm²

TITLE:

M4 HEXAGONAL
THREADED SPACER

DRAWING NUMBER:

R40-101XXXX

SHT
1
OF
1